

Assembly Instructions For


F2461/6



11/12

Extra PIN Qty.	PIN PART	PIN DESCRIPTION
12		Rectangular Crystal Hook
24		Small Bead Hook

	①	②	③	④
Required	X1	X34	X24	X24
Extra	1	4	3	3

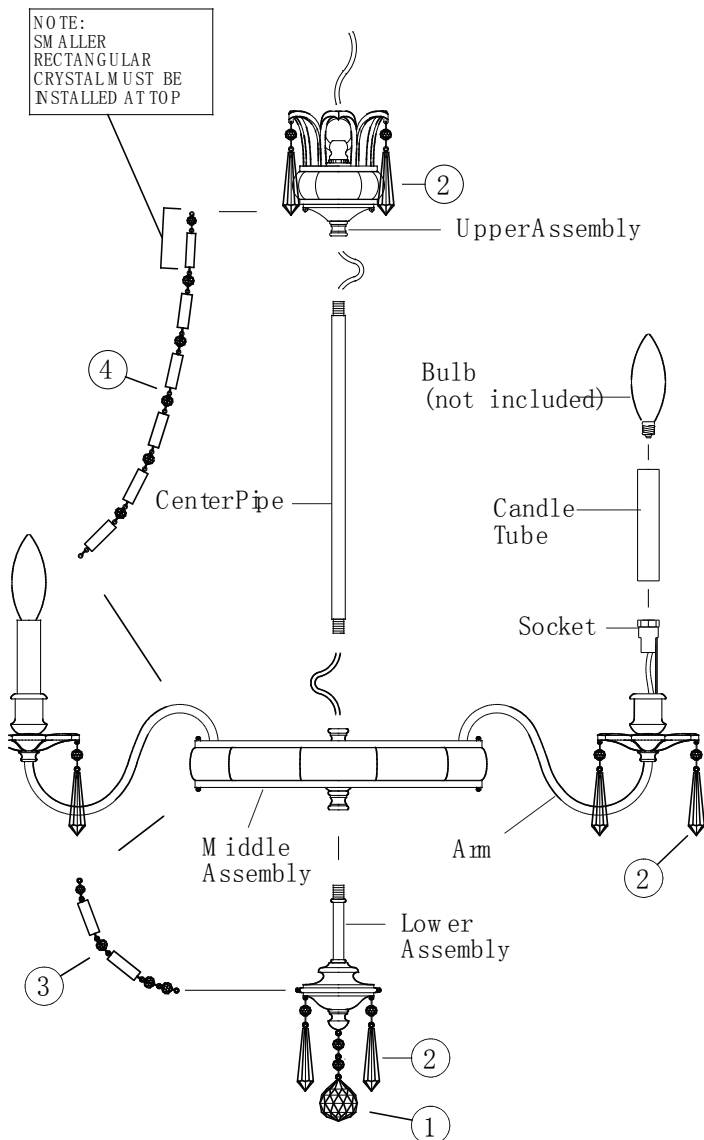

10/31/12

IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER
BOX
BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

1. A. Slip center pipe through fixture wires and then secure by screwing onto top of middle assembly.
B. Slip upper assembly through fixture wires and then secure by screwing onto top of center pipe.
2. Follow enclosed supplement installation instructions for electrical and fixture installation onto house ceiling.
3. Turn arms so they are equally spaced apart from each other.
4. Install lower assembly by screwing onto bottom of middle assembly.
5. A. Install candle tube by slipping through sockets.
B. Install candle bulb E14, 60 Watt maximum bulbs (not included).

6. Hang all crystal glass parts as shown on drawing.
NOTE:
A. For easier installation of crystal chains #3, hook all chains first onto the lower assembly and then proceed to hook onto the middle assembly.
B. For easier installation of crystal chains #4, hook all chains first onto the upper assembly and then proceed to hook onto the middle assembly.
C. To replace broken crystal or pin, extras are included in hardware bag. Replace by gently bending open pin, remove broken crystal or pin, hook new one, then close back pin. Avoid bending pin into sharp angle.

FEISS®

EST. 1955

GENERATION
BRANDS