Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: HOMCOM

Supplier's address: Product Development, Wendenstraße 309, 20537 Hamburg, DE

Model identifier: B31-636V00BK

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	driver		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	36	Energy efficiency class	G
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	2 500 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3000...6000
On-mode power (P_{on}), expressed in W	35,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,30
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control — Height	38	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
Outer dimensions without separate control gear, lighting control — Width	1 140		
Outer dimensions without separate control gear, lighting control — Depth	38		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[a]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,379 0,367
Parameters for LED and OLED light sources:				
R9 colour rendering index value		22	Survival factor	0,90
the lumen maintenance factor		0,97		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,93	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[b]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,3	Stroboscopic effect metric (SVM)	0,3

[a] '-' : not applicable;

[b] '-' : not applicable;

Model No.: FXF21002-36FT80B

Spectral Distribution

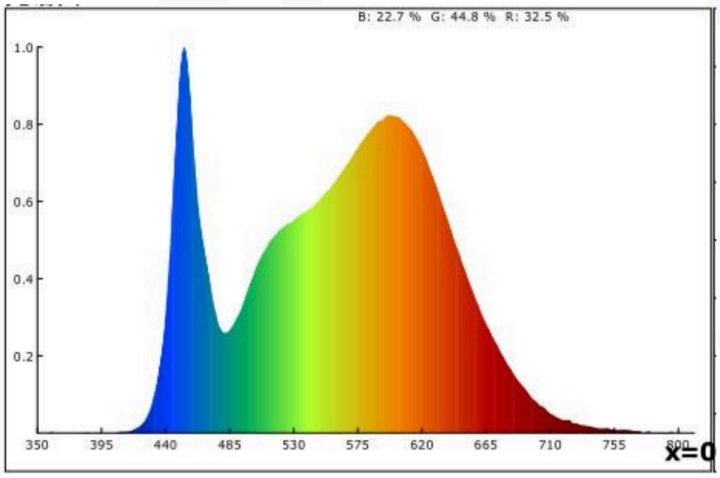

Model placed on the Union market from 01/12/2025.

EPREL registration number: 2478703

https://eprel.ec.europa.eu/qr/2478703

Supplier: MH Handel GmbH (Importer)

Website: https://www.aosom.de/

Customer care service:

Name: Product Development

Website: www.aosom.de

Email: sabine.sundmacher@aosom.de

Phone: +4940883075322

Address:
Wendenstraße 309
20537 Hamburg
Germany