

Assembly Instructions For



F2475/6



11/12

	①	②	③	④ 14 bead	⑤ 11 bead	⑥ 13 bead	⑦ 12 bead	⑧ 16 bead	⑨	⑩
Required	X7	X18	X6	X6	X6	X6	X6	X6	X1	
Extra	1	4	1					1	1	X3

Extra PIN Qty.	PIN PART	PIN DESCRIPTION
12		Small S Hook
12		Large S Hook
24		Small Bead Hook

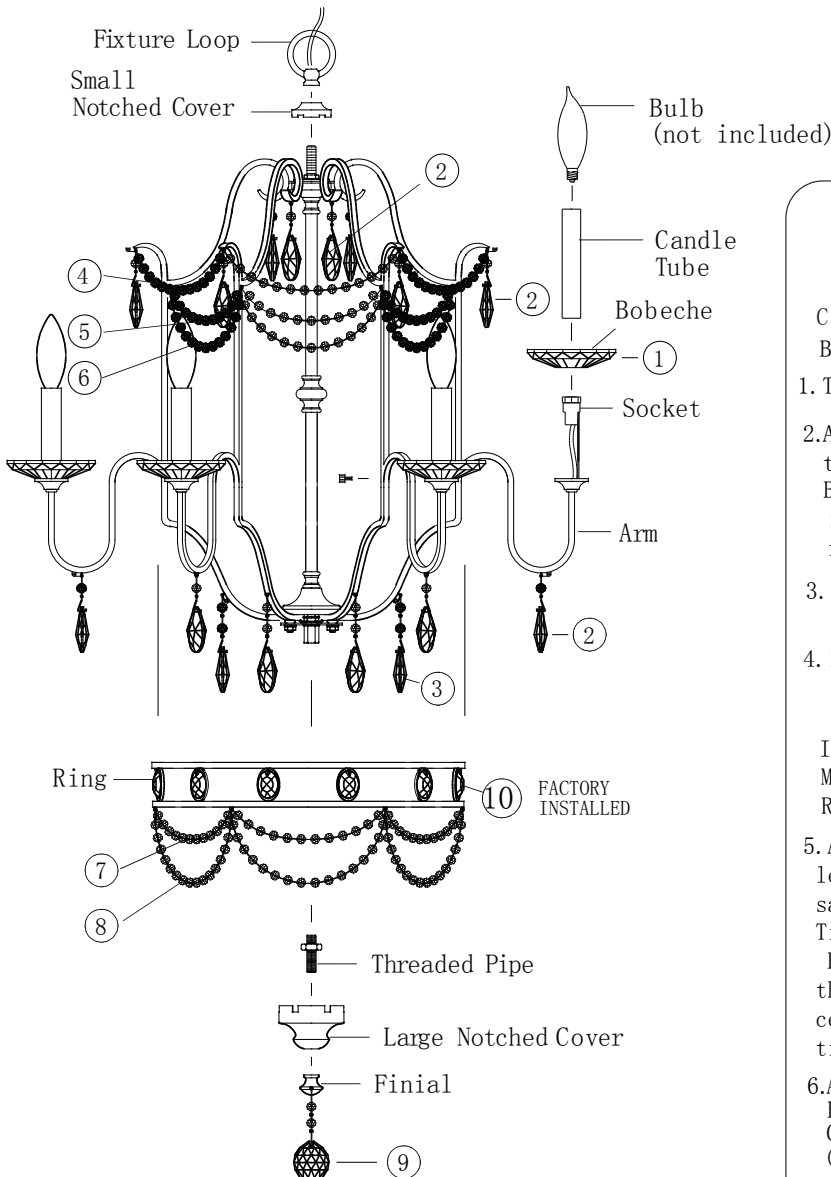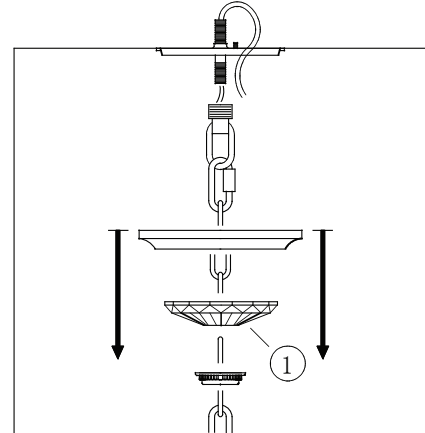

IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly.
Bulbs not included.

1. Turn arms so they are equally spaced apart from each other.

2.A. Slip small notched cover and fixture loop through fixture wires.

B. Install the small notched cover on top of fixture, making certain arms are locked onto it's notches, by fastening with fixture loop.

3. Install ring onto fixture by fastening with thumb screws from behind of arms.

4. Follow enclosed supplement installation instructions for electrical and fixture installation onto house ceiling.

IMPORTANT: WHEN FOLLOWING SUPPLEMENT INSTRUCTIONS STEP#5, MAKE CERTAIN TO SLIDE CRYSTAL BOBECHE (IN BETWEEN COLLAR RING AND CANOPY) DOWN THE CHAIN. See above illustration.

5. A. install a hex nut onto one end of threaded pipe leaving about 3/8" (10mm) of thread exposed. then install same end of pipe by screwing onto bottom of fixture. Tighten hex nut.

B. Slip large notched cover through the installed threaded pipe and secure by fastening with finial. Make certain arms are locked onto it's notches before tightening finial.

6.A. Install crystal bobèche by slipping through sockets.

B. Install candle tube by slipping through sockets.

C. Install candle bulb E14 60 Watt maximum bulbs (not included).

7. Hang all crystal glass parts as shown on drawing.

NOTE: To replace broken crystal or pin, extras are included in hardware bag. Replace by gently bending open pin, remove broken crystal or pin, hook new one, then close back pin. Avoid bending pin into sharp angel.

FEISS®

EST. 1955

GENERATION
BRANDS