

Boynton Outdoor Wall

OL13900, OL13901, OL13902 | 1.0

GENERATION LIGHTING

Outdoor

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

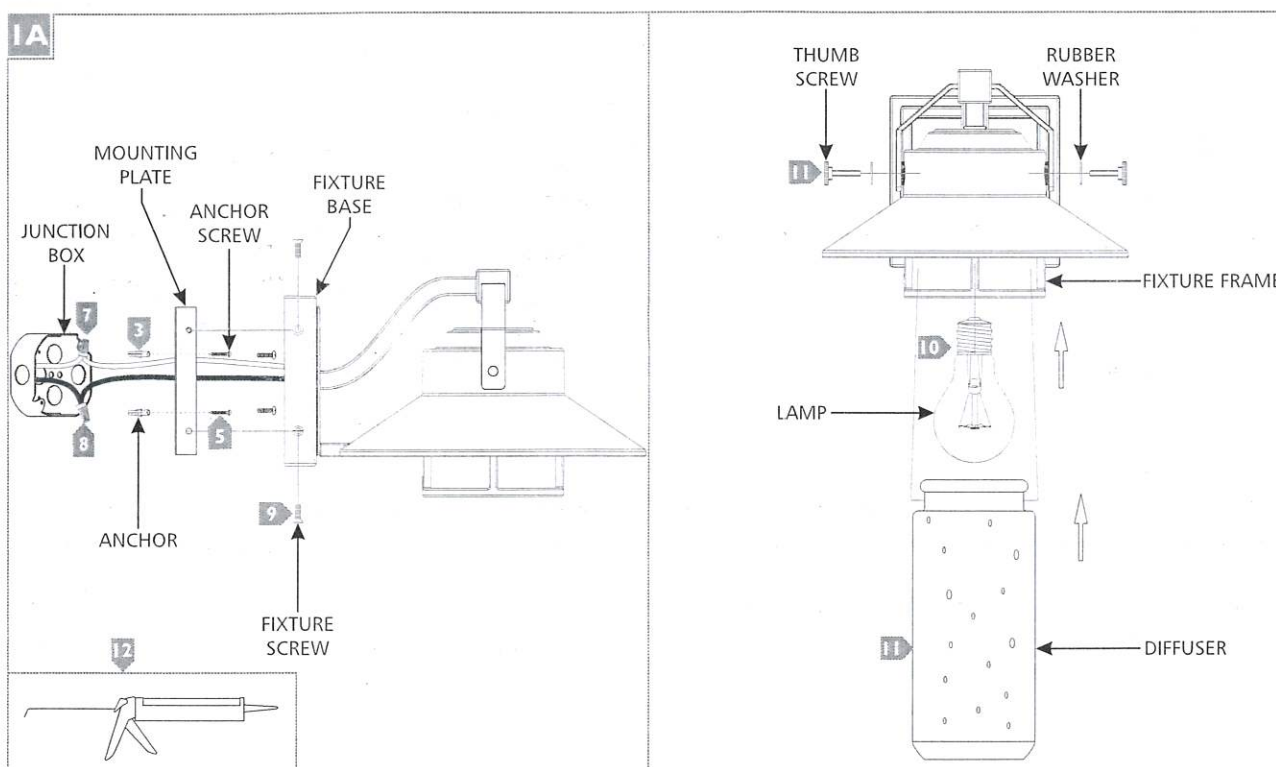

- 1 For Model OL13902 Only: Temporarily install the mounting plate to the junction box.
- 2 For Model OL13902 Only: Mark the anchor hole locations on the mounting plate and remove the mounting plate.
- 3 For Model OL13902 Only: Drill appropriate size holes at the marked locations and install the anchors.
- 4 Secure the mounting plate to the junction box.
- 5 For Model OL13902 Only: Screw the anchor screws into the anchors.
- 6 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire to the hot power line wire with a wire nut.
- 9 Mount the fixture base onto the mounting plate and secure it with the fixture screws.
- 10 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 11 Insert the diffuser into the fixture frame, align the holes on the diffuser with the holes on the fixture, and secure it in place using the rubber washers and thumb screws.
- 12 For wet locations, caulk around the base of the fixture with waterproof construction sealant.