




CHAIR ASSEMBLY MANUAL




PARTS OF THE CHAIR

REMARK: IF YOUR CHAIR IS WITHOUT FEETREST, CAN NEGLECT THOSE STEPS REGARDING FEETREST ASSEMBLY


① Backrest




② Seat



③ Armrest




④ T support




⑤ Gas lift



⑥ Nylon base

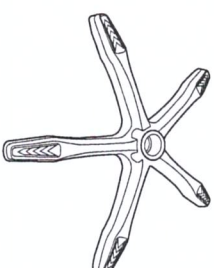


⑦ Wheels



⑧

Screws, joints and adjustment tool





⑨

Head pillow
Waist pillow




⑩


Mechanism

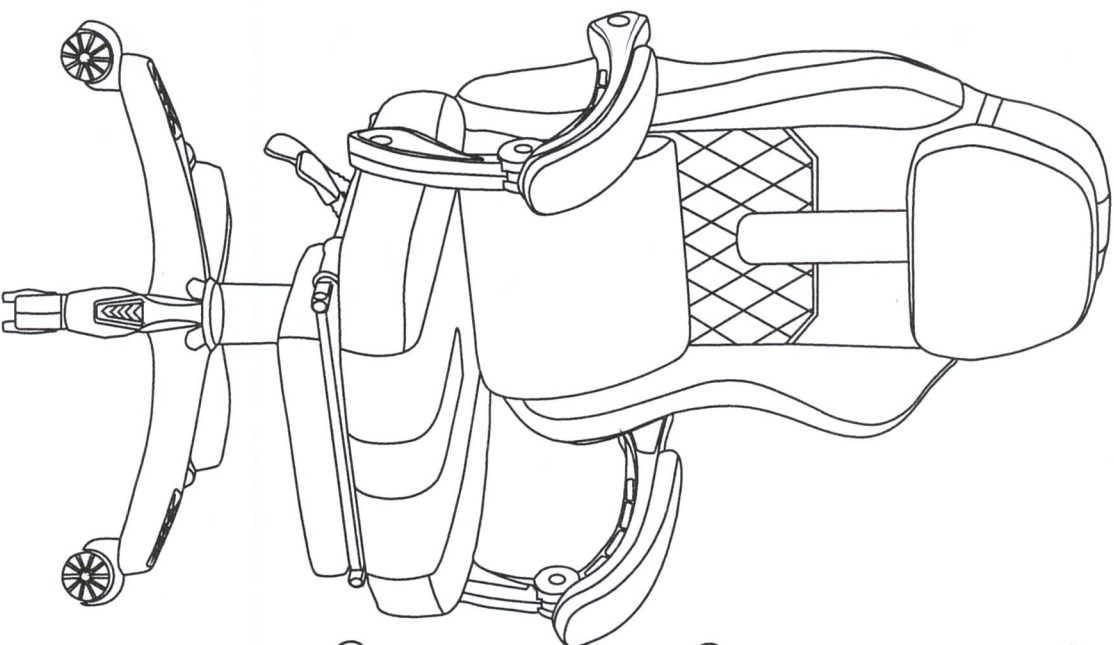


HOW TO ASSEMBLE THE CHAIR

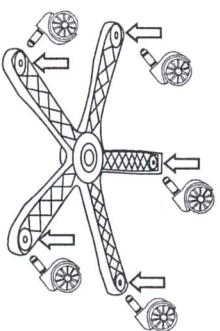


Insert the wheels directly at the base with force.

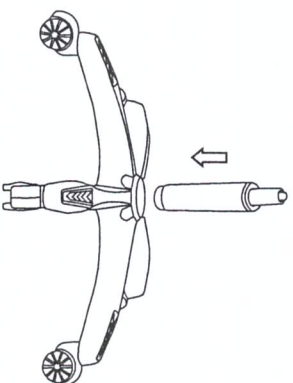


Insert the gas lift directly in the hole of nylon base

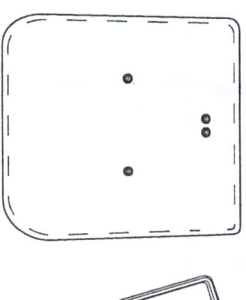


Remove the 4 pre-installed screws in the seat cushion

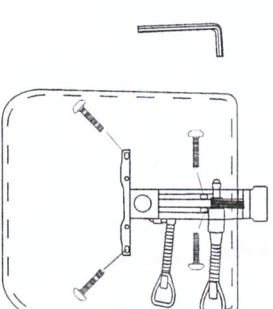


Install the mechanism to the seat

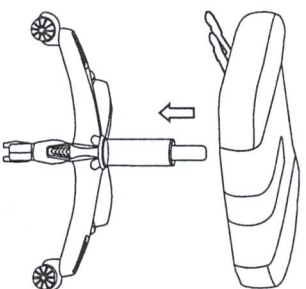


Insert the seat with mechanism directly in the gas lift

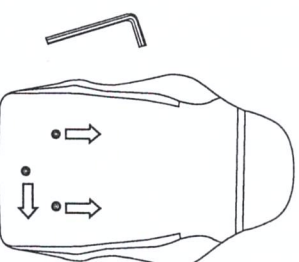


Remove the 3 screws of Pre-installed in backrest

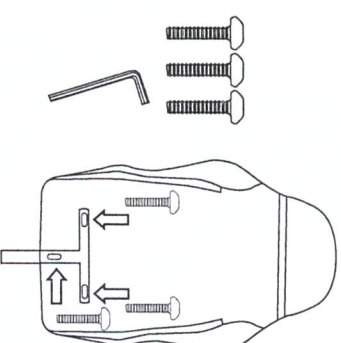


Install the T support in the backrest

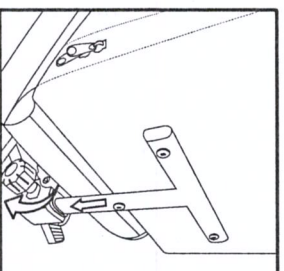


Insert the backrest of the T support directly on the hole of the mechanism

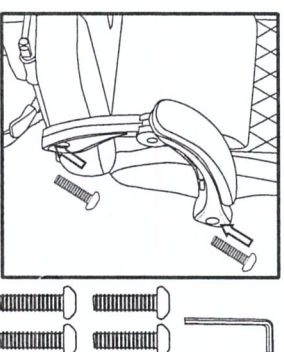

Install the left armrest and right armrest

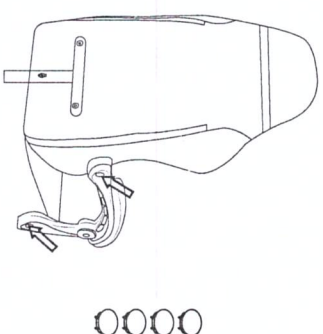

Use a plastic lid for cover the holes of the screws

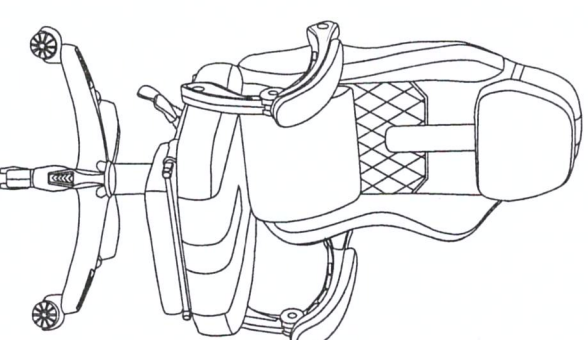

On the mechanism, there are two handles;
The front is used to adjust the height, the rear handle is used to adjust the angle of the backup of the chair, after adjusting the angle, You should press down to Set the reclining angle.