


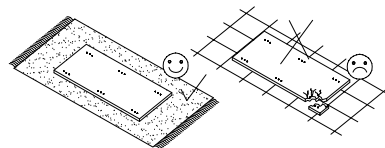
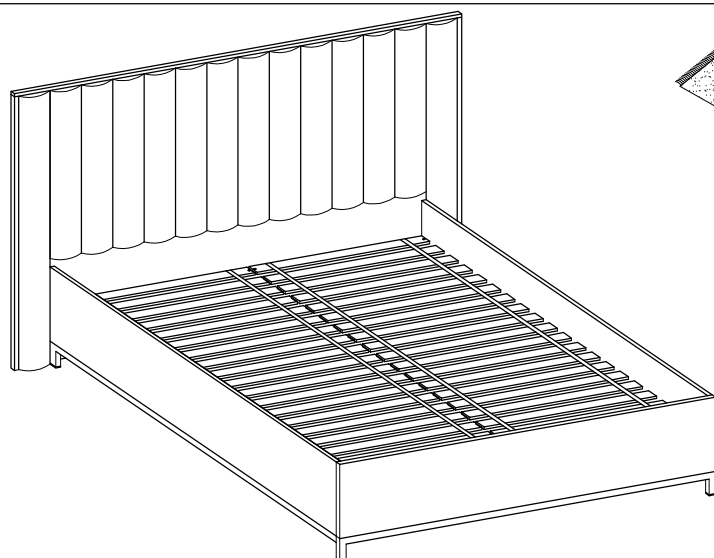


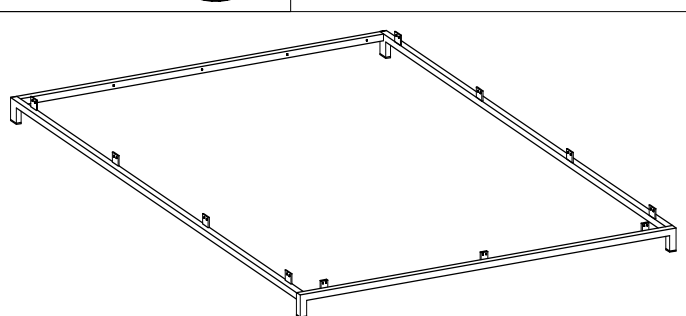
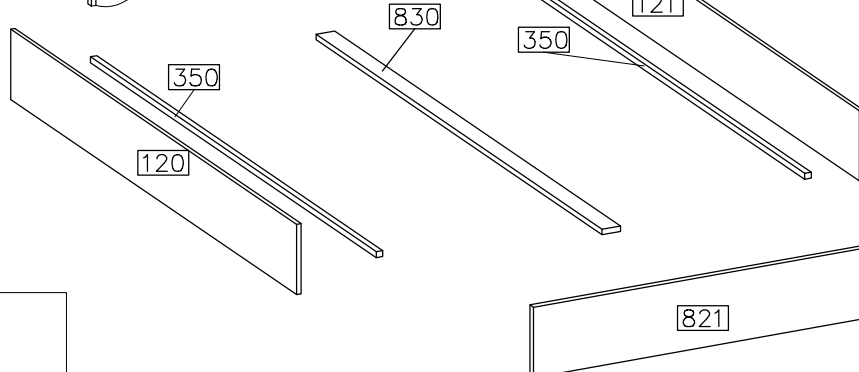




KASZMIR 160

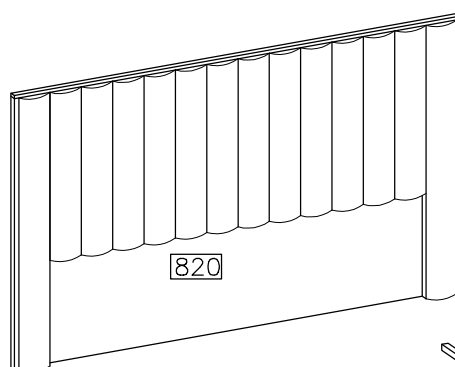

#	ART. NR	QUANTITY
1	820	1
2	821	1
3	120	1
4	121	1
5	830	1
6	350	2
7	360	2

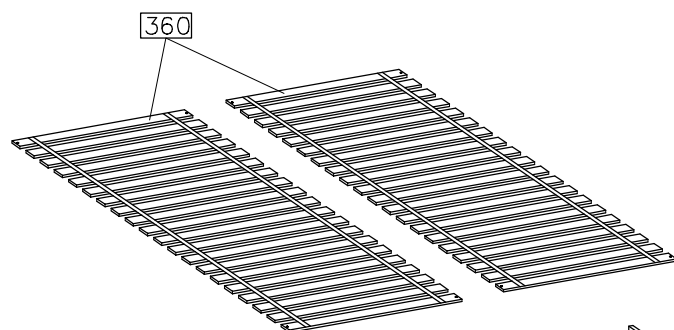

	ø15/12	ø8x30			ø6,3x13mm	ø3.5x30mm	ø4.0x16mm	4.0x40mm
D1	C	A	O11	O15	P6	P27	P1	P14
4	4	12	2	1SET	8	5	22	18

	P1	Z8	R20	N10	F17
	14	2	2	2	2

Technical drawing of a wooden beam assembly. The main drawing shows a beam with a total length of 100cm. The beam is composed of two sections, each 42cm long, with a 16cm gap between them. The beam is supported by a 16cm wide base. A detail view shows a cross-section of the beam with a 1/2 inch gap between the two sections.

2/6

3



D1

4

Ø4.0x16mm






Z8

2




P1

6



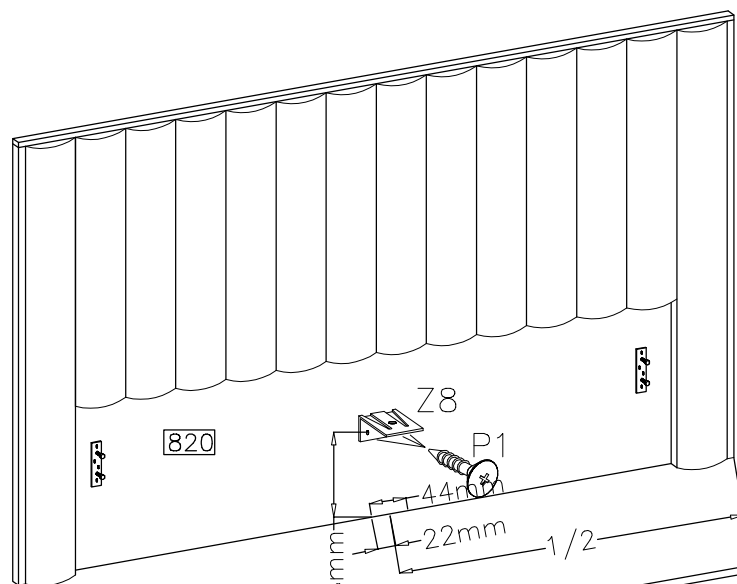


D1

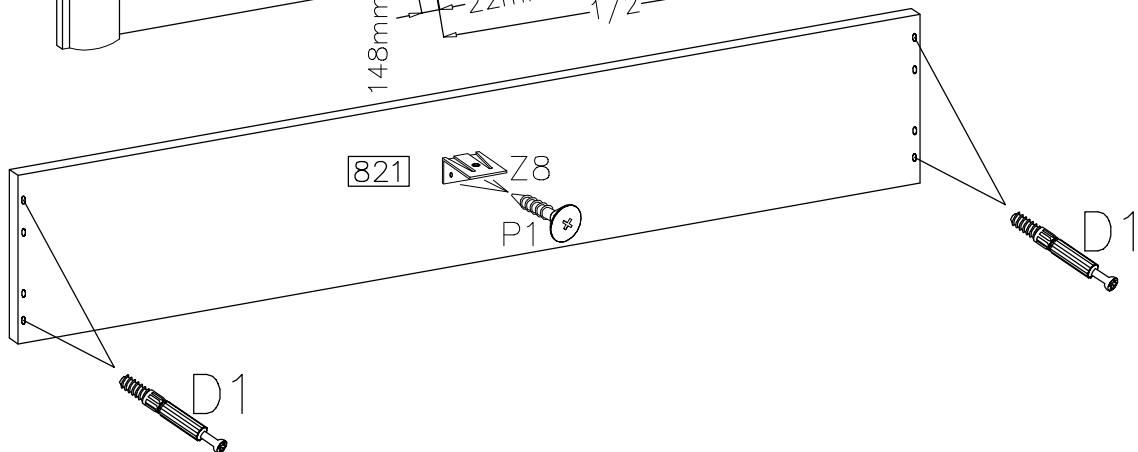

D1

4

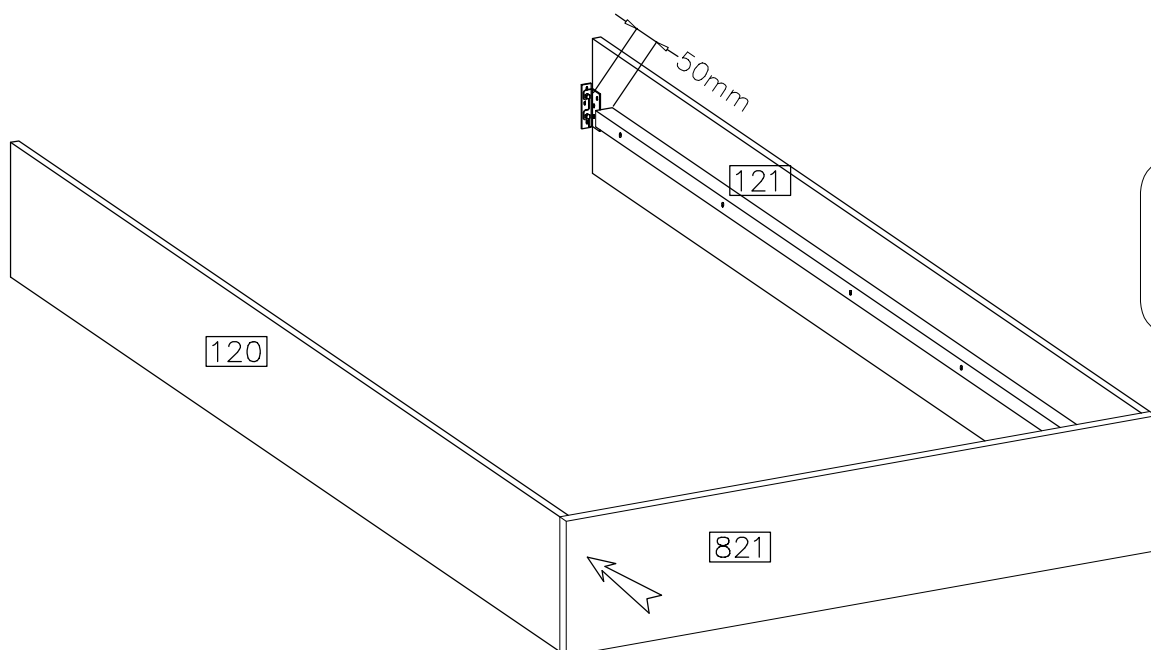




5

ø4.0x16mm



P1

22

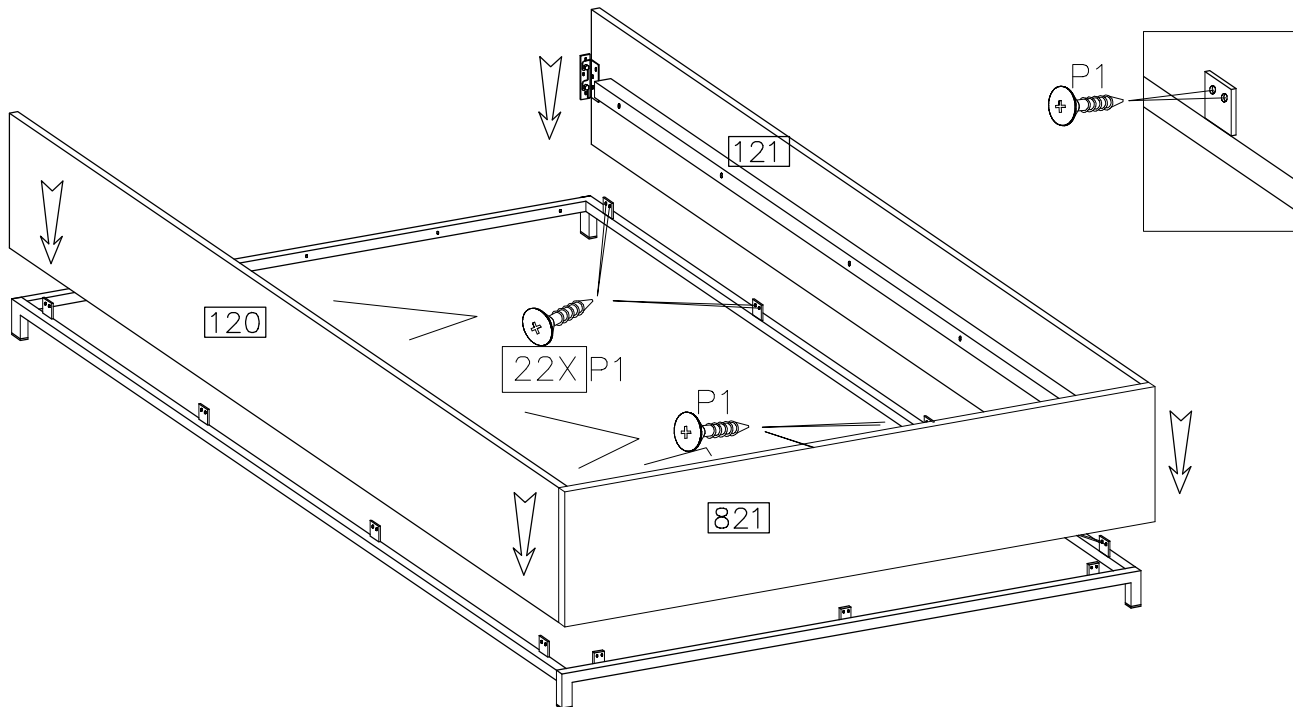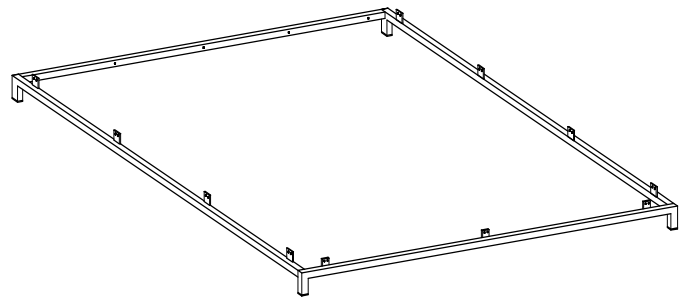





6

ø3.5x30mm




P27

5

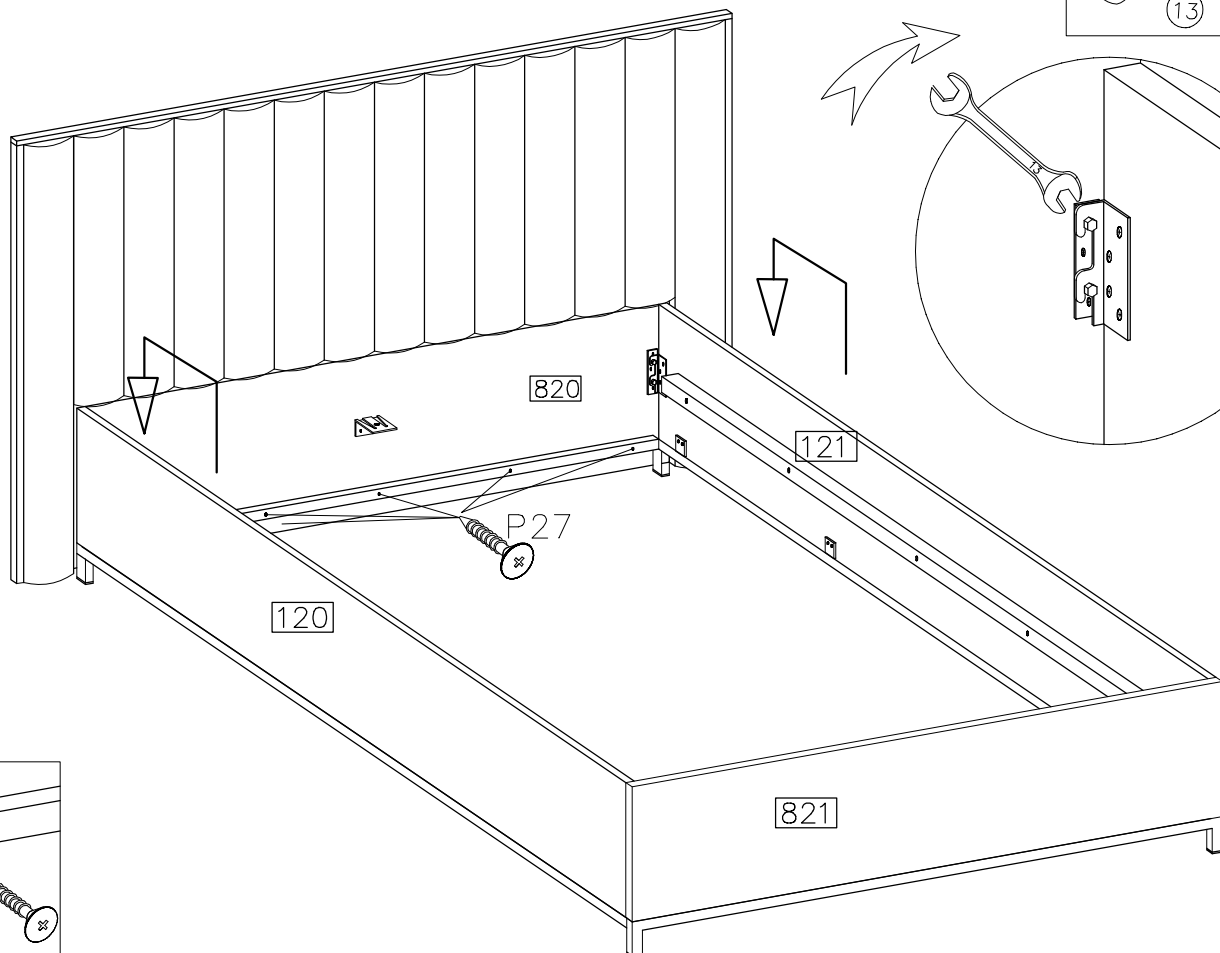


7

	ø4.0x16mm
F17	P1
2	8

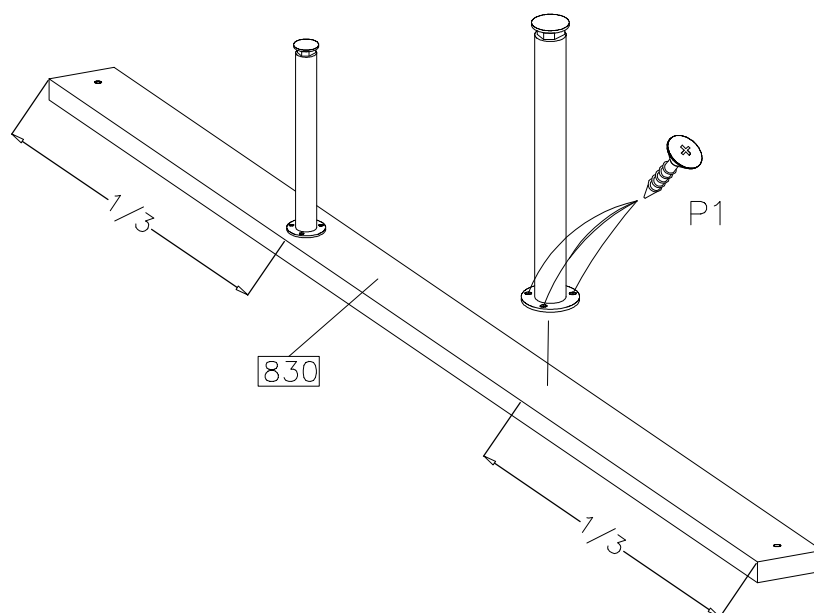

8

M5.0x35mm	M 5
	
R20	N10
2	2

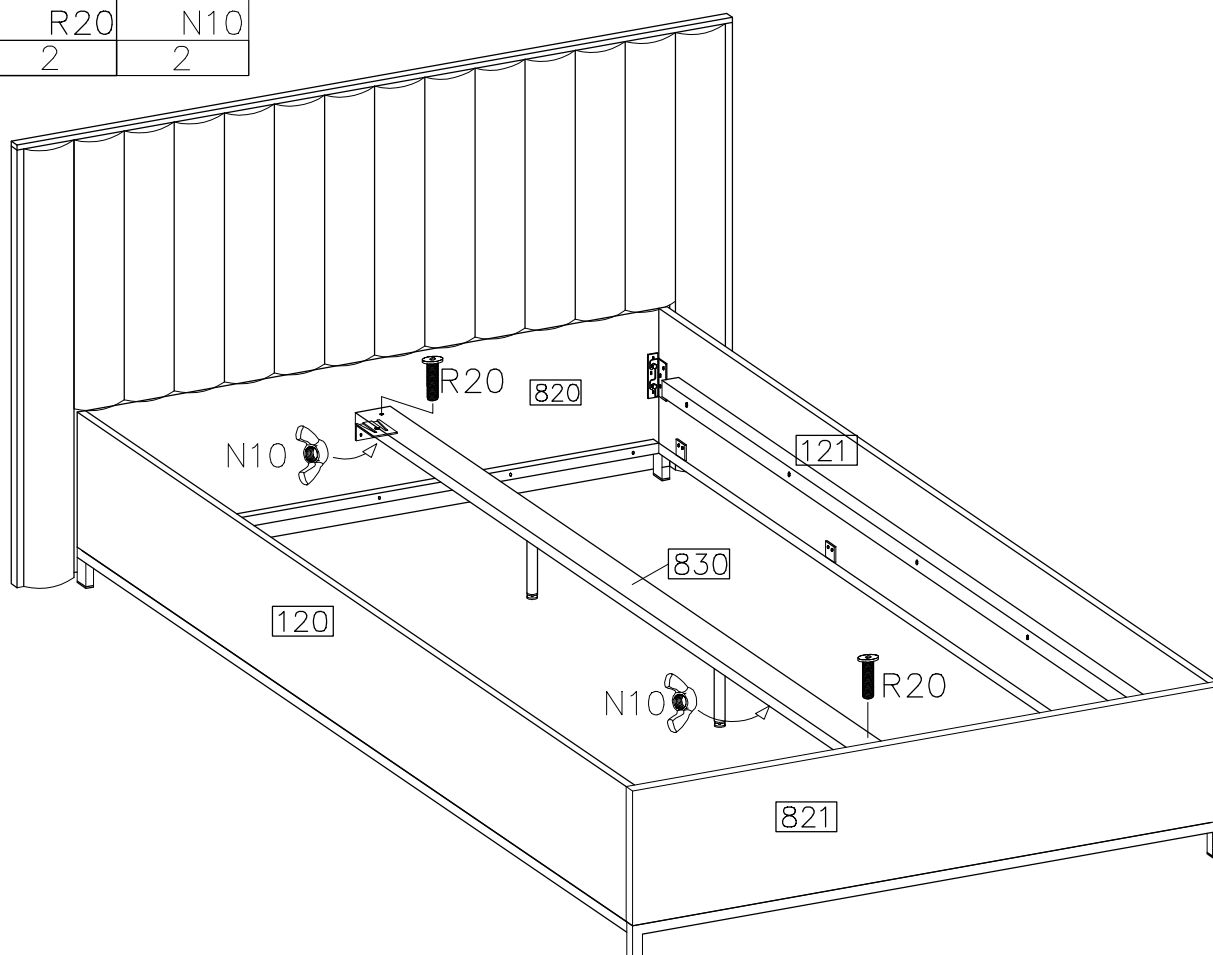

9

4.0x40mm



P14

8

360

