

Valentina 12 Light Chandelier

F2479/8+4 1.0

GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 16077

800.969.3347

www.generationlighting.com

© 2020 Generation Lighting. All rights reserved.




The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.



SAVE THESE INSTRUCTIONS!

Extra PIN Qty.	PIN PART	PIN DESCRIPTION
12		S Hook
6		Bowtie pin
6		Head Pin

	①	②	③	④	⑤ 6 bead	⑥	⑦	⑧ 10 bead	⑨ 12 bead	⑩	⑪	⑫
Required	X1	X12	X4	X4	X8	X8	X32	X8	X8	X8	X8	X1
Extra		1	1	1	1	2	8	1	1	2	2	1

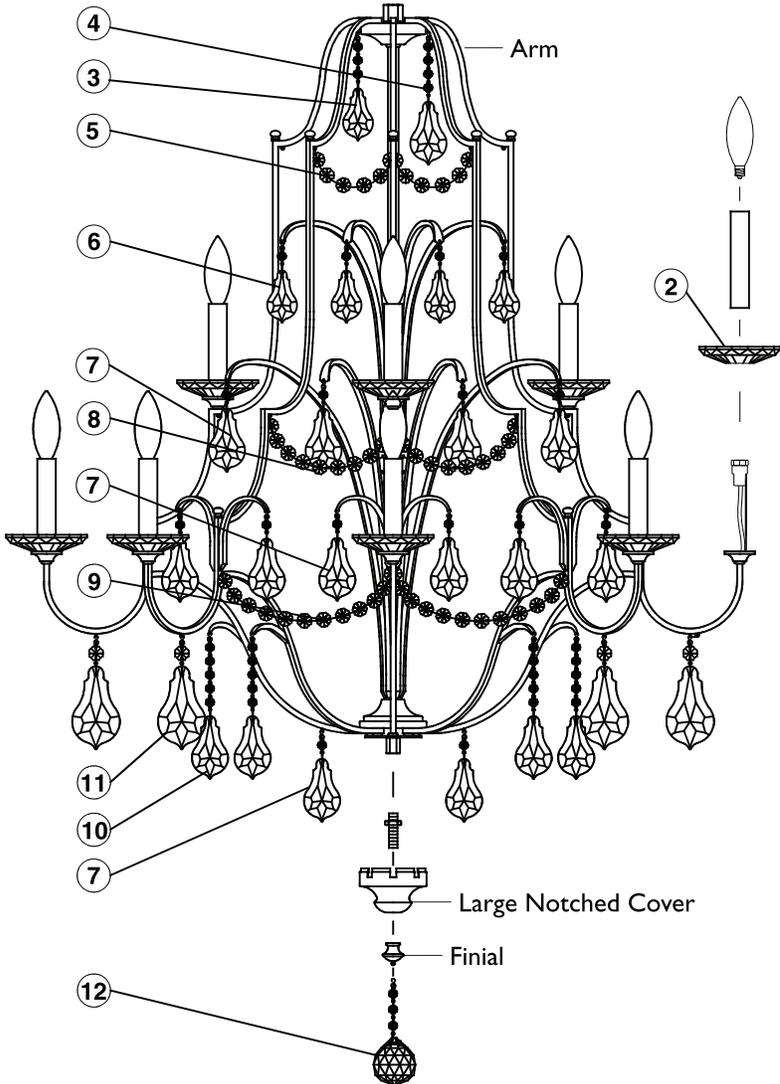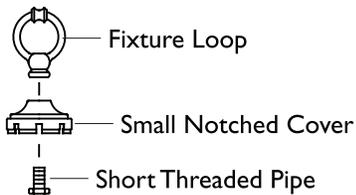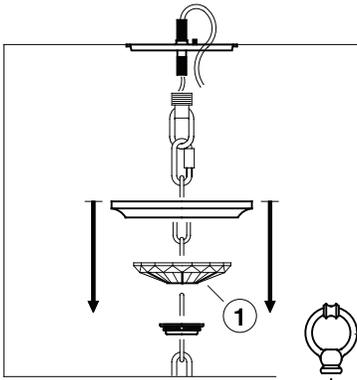

**IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION**

Carefully unpack and identify all parts before assembly. Bulbs not included.

- Turn arms so they are equally spaced apart from each other.
- Install a hex nut onto one end of the short threaded pipe leaving about 3/8" (10mm) of thread exposed. Then install same end of pipe by screwing onto top of fixture. Tighten hex nut.
 - Slip small notched cover and fixture loop through fixture wires.
 - Install the small notched cover on top of fixture, making certain arms are locked onto its notches, by fastening with fixture loop.
 - Install a hex nut onto one end of short threaded pipe leaving about 3/8" (10mm) of thread exposed. Then install same end of pipe by screwing onto bottom of fixture. Tighten hex nut.
 - Slip large notched cover through the installed threaded pipe and secure by fastening with finial. Make certain arms are locked onto its notches before tightening finial.
- Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
IMPORTANT: WHEN FOLLOWING SUPPLEMENT INSTRUCTIONS STEP #6, MAKE CERTAIN TO SLIDE CRYSTAL BOBECHÉ (IN BETWEEN COLLAR RING AND CANOPY) DOWN THE CHAIN. See above illustration.
- Install crystal bobèche by slipping through sockets.
 - Install candle tube by slipping through sockets.
 - Install type-B, candelabra base, of 60 Watt maximum bulbs (not included).
- Hang all crystal glass parts as shown on drawing.
NOTE: To replace broken crystal or pin, extras are included in hardware bag. Replace by gently bending open pin, remove broken crystal or pin, hook new one, then close back pin. Avoid bending pin into sharp angle.