

INSTALLATION INSTRUCTIONS

Please read the instructions carefully before starting work and retain for future reference.

Always turn off the mains supply at the consumer unit, shut off the Circuit breaker or remove the circuit fuse before commencing installation.

WARNING:

This fixture should only be installed by a qualified electrician.

Installation: (see Fig.1)

- 1 Thread the nut (L) onto the nipple (K) and thread the nipple (K) into the coupling (M).
 - 2 Slide the trumpet cover (J) onto the nipple (K) and secure with the finial (I).
 - 3 Position the mounting bracket (D) centrally under the ceiling (A) and mark through the fixing holes onto the ceiling (A). Check that there are no hidden cables at these positions and drill holes for wall anchors (B) into the ceiling (A).
 - 4 Insert wall anchors (B) into holes in the ceiling (A).
 - 5 Align the fixing holes in the mounting bracket (D) with the holes, and secure the mounting bracket (D) with screws (E).
 - 6 Take out 2pcs silicon tube from hardware bag and put over individually the Mark "L" and "N" wire.
 - 7 Connect the Brown wire to the mark "L", Blue wire to the mark "N" and Green Yellow wire to mark \oplus on the terminal block (C).
 - 8 Make electrical connections in the terminal block (C) as follows:(see FIG.2 only this step)
 - n Connect the BROWN wire from the fitting to the BROWN/RED (live) wire of the supply cable.
 - n Connect the BLUE wire from the fitting to the BLUE/BLACK (neutral) wire of the supply cable.
 - n Connect the GREEN/YELLOW wire from the fitting to the bare ground wire in the supply cable, covered along its exposed length with GREEN/YELLOW SLEEVING.

If there is more than one supply cable present, seek professional advice.
 - 9 Check that the terminal screws are tightened securely and that there are no stray wires.
 - 10 Raise canopy (G) allowing the mounting screw (F) to protrude through the hole in the canopy (G), and secure with decorative nut (H).
 - 11 Install light bulbs. (Not provided).
- Do not exceed the maximum wattage recommended on lamp holder.**

If the external flexible cable of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.


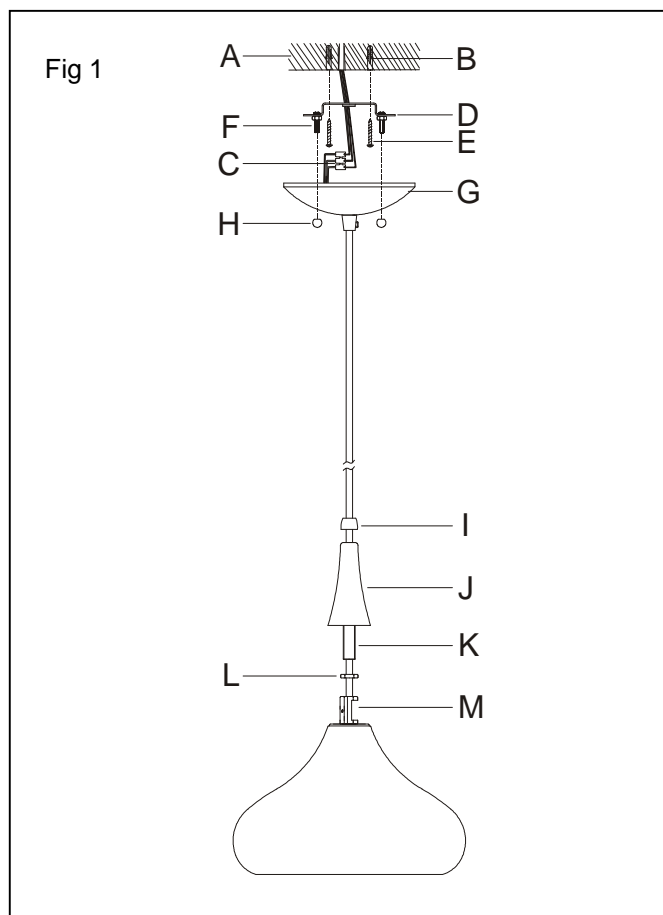


FIG.2

WIRING DIAGRAM MODERN LOOP-IN SYSTEM

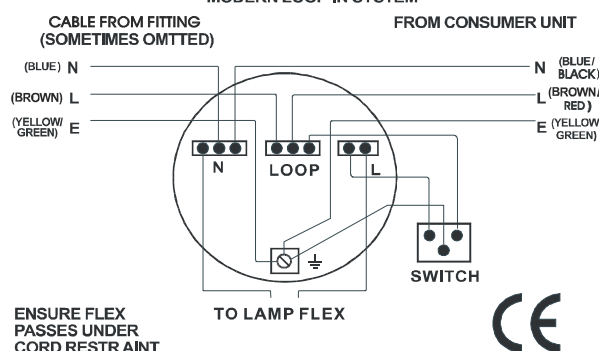

IF IN ANY DOUBT ABOUT WIRING CONSULT AN ELECTRICIAN

WIRE COLOUR CODE ARE BASED ON I.E.E REGULATIONS

ITEM NO: P1254 P1253

FOR INDOOR USE ONLY