

Fixture Assembly Instructions

NOTE: ALWAYS TURN POWER OFF TO ELECTRICAL PANEL BEFORE INSTALLING LIGHTING FIXTURES!
IMPORTANT: YOU SHOULD USE A QUALIFIED ELECTRICIAN TO INSTALL THIS FIXTURE.

Assembly and Installation Instructions:

1. Ensure the house electricity supply is off at the fuse board.
2. You May find there are more than 3 sets of cables connected within the ceiling rose. Before removing the existing rose. Carefully note down the position of each set of cables. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting.
3. Loosen retaining screw under ceiling cup and gently slide cup to the Bottom of the rod, thus revealing the mounting bracket at the top of the rod. Ensure screw is fully withdrawn before moving cup so that it does not scratch the finish of the center rod.
4. Screw the ceiling hook to the ceiling, ensuring that the screws are fixed firmly into a ceiling joist or other solid mounting and not just the plaster. Using the mounting bracket hang the fitting onto the hook.
5. The weight of the fitting must be supported whilst you make the electrical connections. Connect the live (brown) wire(s) of the fitting to the supply live (normally red). Connect the neutral (blue) wire(s) of the fitting to the supply neutral (normally black). Connect the earth (green/Yellow) wire(s) of the fitting to the supply earth (normally unsheathed or green/yellow).

NOTE: Connector Blocks supplied with this product are not part of the fitting but are supplied to assist installation. Ensure Electrical connections are tight and no loose strands of wire are left out of the connector block. Cover the connectors and adjacent wiring with a good quality insulation tape.

6. Gently slide the ceiling cup back up the rod to cover the mounting bracket and ceiling hook, take care not to damage wiring or finish on the rod. Tighten the retaining screw under the ceiling cup to hold it in place.
7. Put the crown through the nipple of the fixture assembly and secure it with rod.
8. Slide the sleeves over sockets.
9. Fit the bulb, type and wattage as indicated on the fitting. The wattage indicated must not be exceeded.
10. The Crystals can be hung through the small holes if desired.
11. Switch on the electricity supply at the fuse board.

Safety information

- *If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- *Before installation and servicing disconnect the electricity supply at the fuse board.
- *To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- *This fitting should be fitted to a lighting supply (with earth) protected by a 5 amp fuse or equivalent circuit breaker.
- *Always be sure to use the correct type and wattage of bulb as indicated on the fitting, dispose of old bulbs carefully.

RETAIN THIS SHEET FOR FUTURE REFERENCE

Fig.1

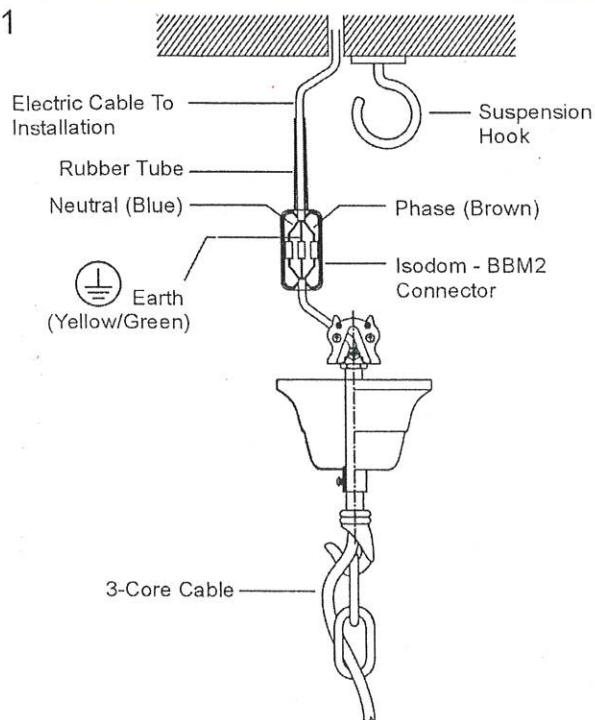


Fig.2

