

Assembly Instructions For

F2468/4

(CE) 11/12



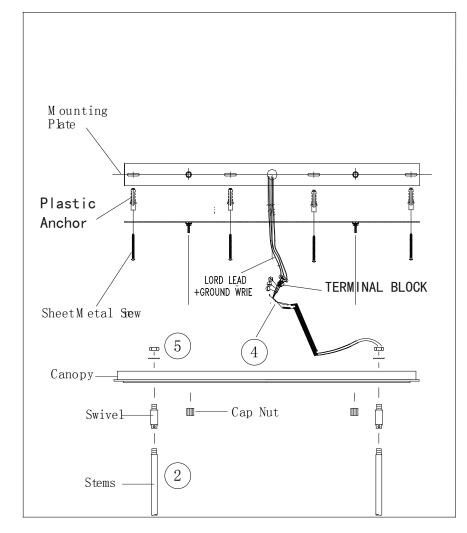

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

- Install light bulb (not included). See relamping label at socket area for type and maximum allowed wattage.
- 2. Install stems:

A.Choose desired installation height from dimensions shown in above diagram. Thread fixture wires through each stems to be used. Note correct position of stems from left diagram. Screw all stem together until secure.

B.Pass fixtures wires located above the assembled stems through a swivel. NOTE: Correct position of swivel from left diagram. Install swivel by screwing onto top end of stem. Install another swivel onto opposite stem assembly. C.Pass fixture wires located above swivel and pass through a hole in canopy. Lock them together by fastening with a lock washer and hex nut from above. Repeat other side (without wires).

3. Install mounting plate:

A. Test install the mounting plate onto ceiling by fastening with four screws supplied

B. Mark with pencil the two holes on mounting plate.

C. Remove mounting plate.

NOTE: If in doubt what type of ceiling then consult a qualified contractor or electrician for installation.

D. Before fastening the mounting plate, pass supply wires and ground wire from ceiling through center hole in mounting plate.

4. Connect electrical wires:

A.Cut any excess fixture wires and ground wire leaving only about $8^{\prime\prime}$ (20 cm) length from top of canopy. Then split fixture wires (with plastic insulation) and strip off $3/4^{\prime\prime}$ (19 mm) of plastic insulation from each end.

B.W ire connection-please refer the encloused assembly instruction for wire connection.

5. Install canopy:

While carefully tucking all electrical wires inside of canopy, install the canopy onto the mounting plate by fastening with two cap nuts.

