
EST. 1955

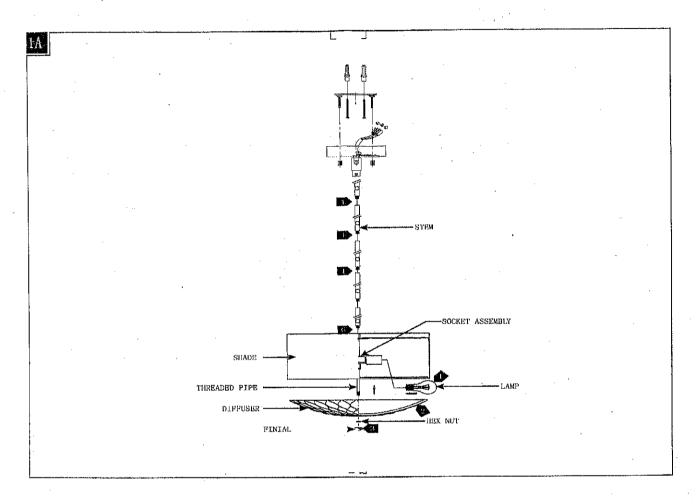

- Reach inside the shade and screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- Place the diffuser onto the threaded pipe and secure it in place by screwing the hex nut onto the threaded pipe.
- Screw the finial onto the threaded pipe.
- Determine the height of the fixture with the provided stems and assemble them by screwing them together.
- 5. Secure the mounting plate to the cieling.
- Feed the fixture wires through the stem assembly and screw the stem assembly to the socket assembly.
- Feed the fixture wires through the canopy and screw the canopy onto the stem assembly.
- Follow enclosed supplement installation instructions for electrical and fixture installation onto house cieling.
- Place the canopy onto the mounting plate and fixed by 2 cap nuts.