


Assembly Instructions For



04/14

OL3001PED OL3003PED

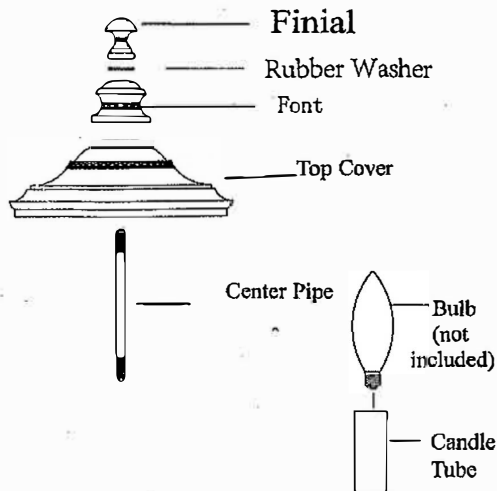

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly.

Bulbs not included.

1. Screw short threaded end of center pipe into socket assembly.

2. Slip candle cover tube onto sockets.

3. Install light bulb (not included). See relamping label at socket area for type and Maximum allowed Wattage.

4. Slide top cover and font through center pipe till checks onto main frame. Lock them into position with rubber washer and finial.


5. Electrical Installation onto post: if you are replacing an existing fixture, discontinued and remove the old fixture.

A) Slip post cup over Pier-Mount. Mark position of holes in post cup on Pier-mount.

B) Drill 1/8" (3mm) diameter pilot holes in Pier-mount at places where marked.

C) Make wire connection; please follow enclosed supplement installation instructions for electrical installation and fixture installation.

D) Slip post cup onto Pier-mount. Align holes in post cup with holes in Pier-mount. Attach post cup to Pier-mount with sheet metal screws.

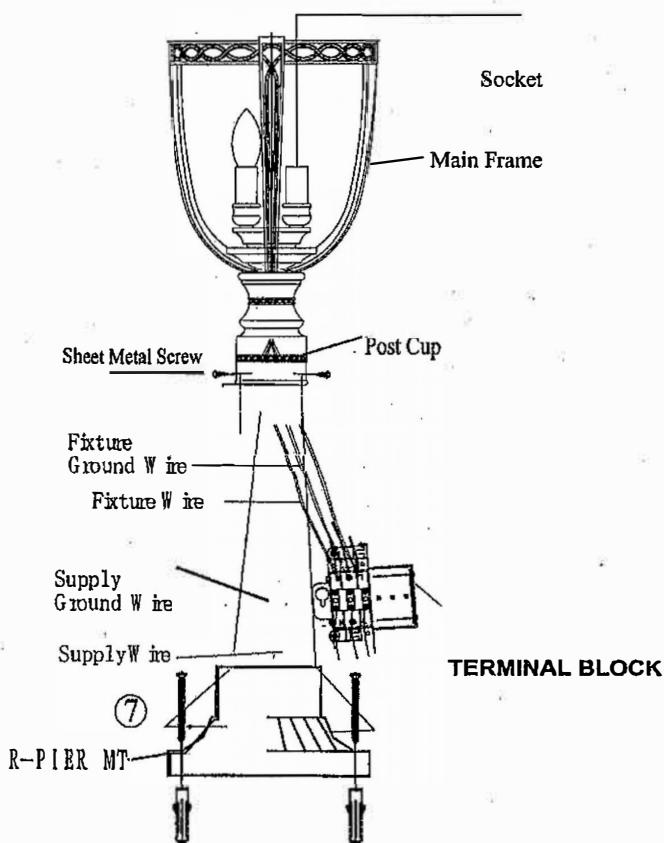

GENERATION BRANDS

GENERATION
BRANDS™

PLEASE RETAIN THESE INSTRUCTIONS FOR REFERENCE HELP LINE

(0) 1420-82377

www.elsteadlighting.com