POLAR XS SE

Domus Line
design

LED spotlight for inside cabinet lighting

Materials:
aluminium, polycarbonate
Finishes:
aluminium, black matt
**Light source:**
LGP LED module
Wiring:
2000mm
Application type:
inside cabinet
Installation:
surface

	cm		Lux
		80°	
	30		1400
	50		550
		80cm	

Colour appearance	natural white
Colour temperature	3900 K
Luminous flux	325 lm
Luminous efficiency	65 lm/W
CRI	Ra ≥ 80

	cm		Lux
		80°	
	30		1400
	50		550
		80cm	

Colour appearance	warm white
Colour temperature	3000 K
Luminous flux	325 lm
Luminous efficiency	65 lm/W
CRI	Ra ≥ 80

	cm		Lux
		80°	
	30		1200
	50		450
		80cm	

Colour appearance	super warm white
Colour temperature	2700 K
Luminous flux	300 lm
Luminous efficiency	60 lm/W
CRI	Ra ≥ 80

DOMUS LINE

POLAR XS SE
without switch

CE CB SCHEME ⊗ cULus [1] ⬦ 🏠

Code	Watt & Volt	Light colour
13257_ _N	5W @ 24Vdc	natural white
13257_ _B	5W @ 24Vdc	warm white
13257_ _B1	5W @ 24Vdc	super warm white

LED CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

24Vdc   **Micro 24**

Code	Finish
05	aluminium
32	black matt

80
80
5

For D-MOTION versions, consult the 2020 SPRING collection catalogue or see www.domusline.com.
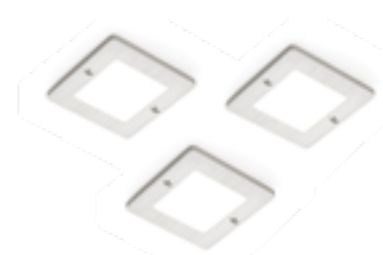
SETS OF 2, 3, 4, 5 **POLAR XS SE** AND POWER SUPPLY ARE AVAILABLE ON REQUEST.

POLAR XS SE is a fixture made entirely of aluminium with a thickness of only 5mm. The luminaire integrates a special **LGP LED** cluster which offers a wide and diffused light projection, without the dot-effect.
POLAR XS SE has been designed for fast surface mounting with only two screws.

[1] For UL-certified model codes, see the **American standard LED collection catalogue**, also available at www.domusline.com

FINISHES

ALUMINIUM (code 05)

BLACK MATT (code 32)