


# Assembly Instructions For **FM324**



11/12

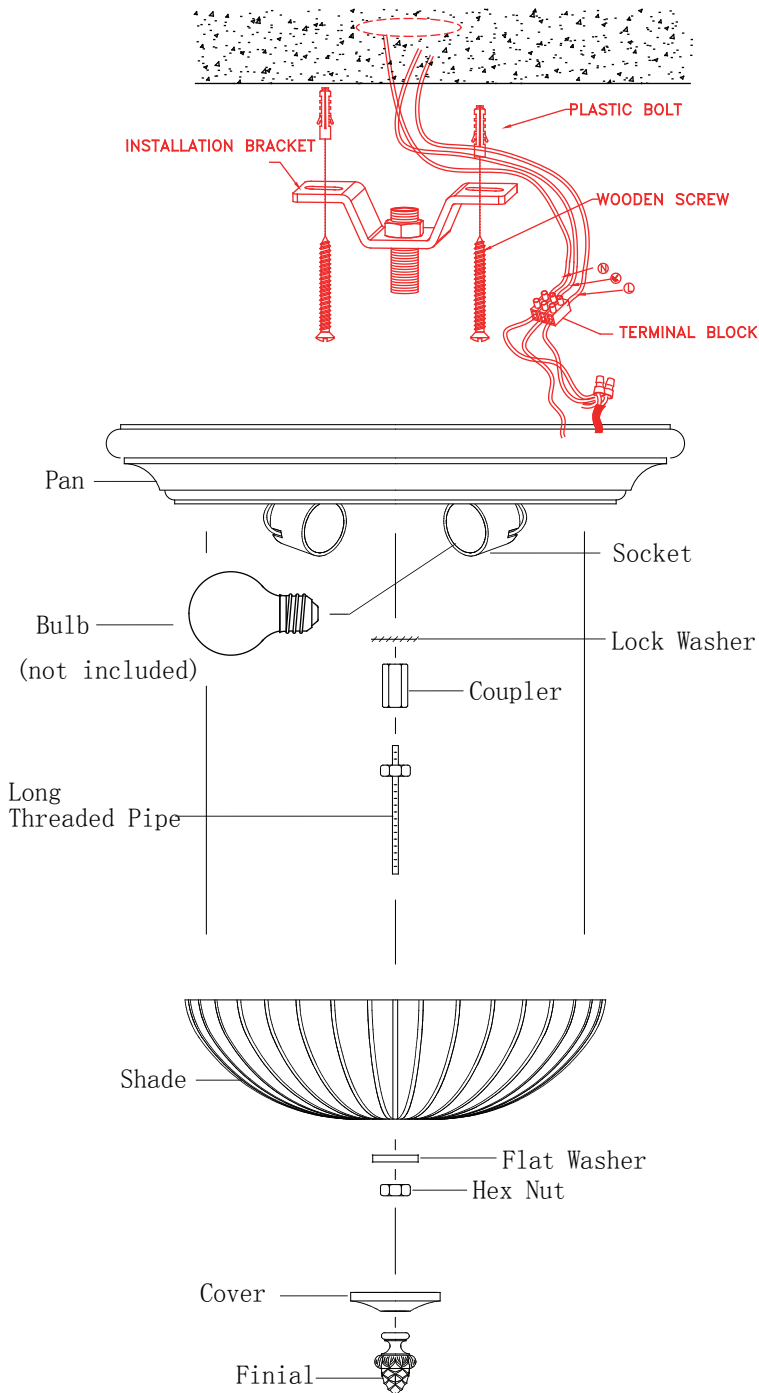

**IMPORTANT**  
TURN OFF THE POWER AT THE MAIN FUSE OR  
CIRCUIT BREAKER BOX  
BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulb not included.

1. Attach installation bracket securely to ceiling with two wooden screws through slot at each end of installation bracket.
2. Fasten one hex nut about 3/4" (19 mm) down from one end of threaded pipe. Then screw same end of threaded pipe into center hole in mounting bar. At this point test install the pan onto ceiling through this threaded pipe and make certain 3/8" (10 mm) of pipe protrude below. If not, then adjust the threaded pipe location by screwing up or down accordingly. Once correct threaded pipe location has been adjusted, remove pan and tighten hex nut against mounting bar. Make certain not to spin threaded pipe during tightening.
3. Electrical connections: Follow enclosed supplement installation instruction for connection.
4. Place pan thru top threaded pipe so that it sits flush against ceiling. Be sure all wires are inside pan. Secure pan to ceiling by fastening lock washer and coupler onto top threaded pipe. Note: Coupler must turn at least 3 times, if it does not you must remove coupler and lengthen threaded pipe accordingly.
5. Install bulb (not included). See relamping label located at socket area for type and maximum allowed wattage.
6. Install a hex nut onto one end of long threaded pipe leaving about 1/2" (13 mm) thread exposed. Screw same end of threaded pipe into coupler. Tighten hex nut.
7. Slip glass shade up till it checks into bottom of pan. Then lock into position by fastening with flat washer and hex nut. Do not over tighten.
8. Slip lower font through same threaded pipe and secure by fastening with finial.