


# ASSEMBLY INSTRUCTIONS FOR SF239

CE 11/12

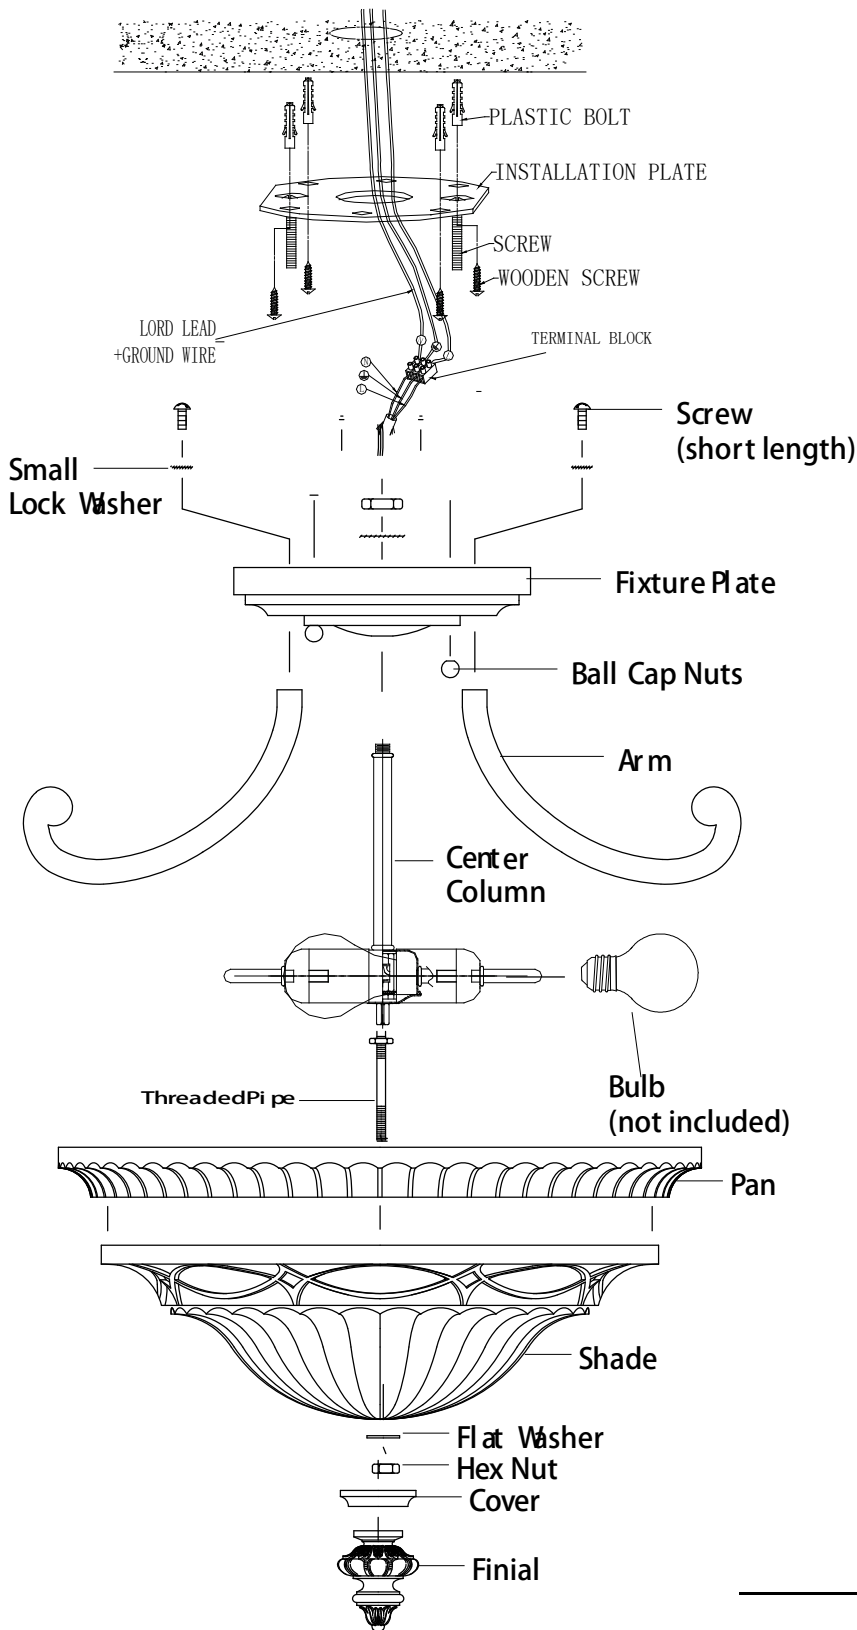

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE  
OR CIRCUIT BREAKER BOX  
BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs are not included.

1. Take fixture wire and ground wire exiting above center column and thread through, fixture plate, lock washer and hex nut. Lock all together by tightening hex nut.
2. Install upper section of arms onto fixture plate by fastening with screw (short) and small hex nut.
3. Install a hex nut onto one end of long threaded stud leaving about 3/8" (10 mm) thread exposed. Screw same end of threaded stud into bottom of socket assembly. Tighten hex nut.
4. Follow enclosed supplement installation instructions for electrical and fixture installation onto ceiling.
5. Install light bulbs (not included). See relamping label located near socket area for type and maximum allowed wattage.
6. Sit decorative pan on top of glass shade. Then while holding securely onto the glass shade, slide through the installed threaded pipe until pan touches bottom end of arms. Secure into position by fastening with a flat washer and hex nut. Afterward, slip cover and install finial by screwing onto protruding threaded pipe.

A Quality Home Brands Company®

**FEISS**

EST 1955

GENERATION  
BRANDS