

# Assembly Instructions For **VS16402**




11/12

**IMPORTANT**  
TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX  
BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

1. Install mounting plate:  
A. Take supply wires from wall and carefully pass them through center hole of mounting plate.  
B. Install mounting plate onto the wall using two screws supplied.
2. Install anchor (included):  
A. Test install fixture plate onto the mounting plate. Then while the fixture plate is leveled horizontally, use a pencil to mark two holes located on the fixture plate.  
B. Remove the fixture plate and set aside.  
C. Drill marked spots. If drywall or masonry wall then use 1/4" (7 mm) drill bit; if wood wall then use 1/8" (4 mm) drill bit.  
D. Drywall or masonry wall only: Insert plastic anchor into pre-drilled holes.
3. Connect electrical wires: Follow enclosed supplement installation instruction for connection.
4. Install fixture plate:  
A. Install fixture plate onto mounting plate by fastening with two cap nuts.  
B. Secure fixture plate onto pre-drilled holes using sheet metal screws (included).
5. Install glass panels:  
A. Gently sit long glass plate at bottom of fixture frame.  
B. Gently grabbing onto side glass panel, slip inside of main frame. Make certain bottom edge of panel sits inside of bottom tabs. Then secure glass panel by bending tabs located at top. Repeat rest panels.
6. Install candle bulb E14 (not included).  
**IMPORTANT:** See relamping label at socket area for maximum allowed wattage.

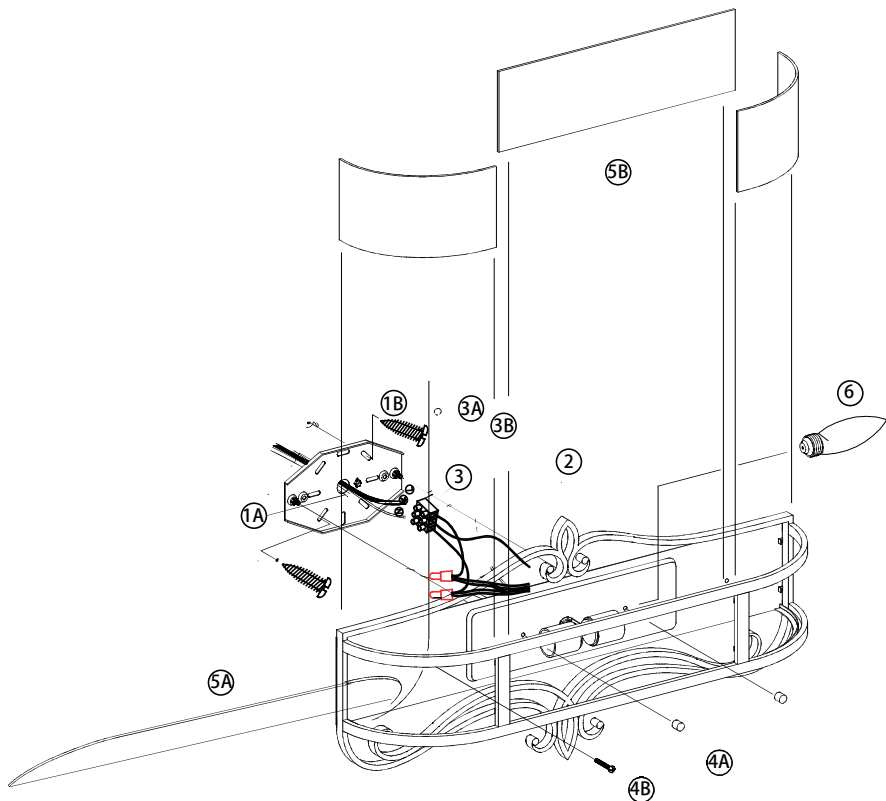

# FEISS®

EST. 1955

GENERATION  
BRANDS®

