

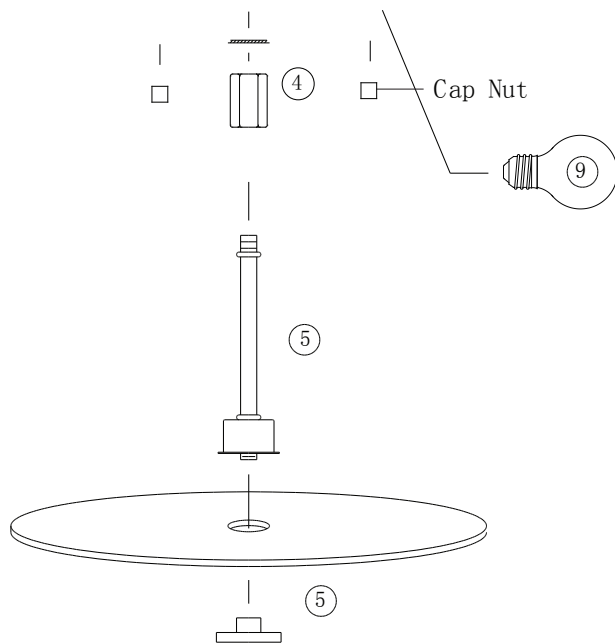


# Assembly Instructions For

# FM339

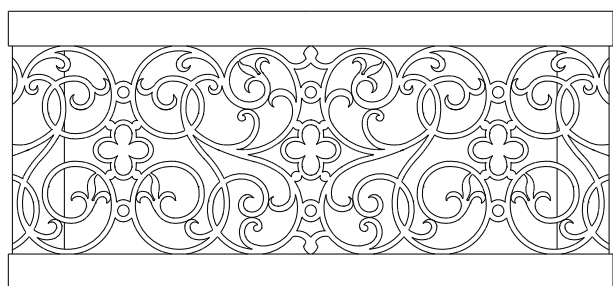

11/12

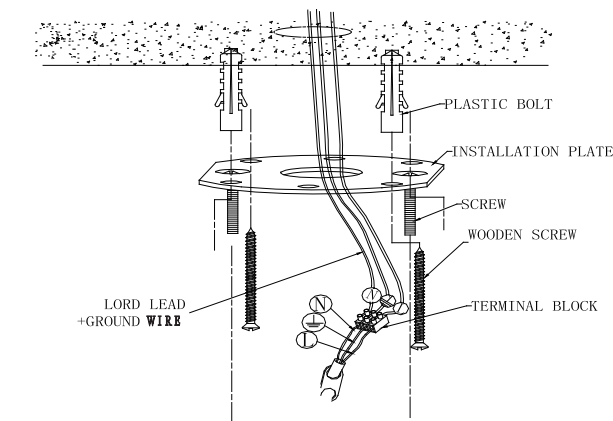

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

1. Use plastic bolt and wooden screw to fix the installation bracket onto the ceiling surface.
2. Fasten one hex nut about 3/4" (19 mm) down from one end of threaded pipe. Then screw same end of threaded pipe into center hole in bracket strap. At this point test install the main frame onto ceiling through this threaded pipe and make certain 3/8" (10 mm) of pipe protrude below. If not, then adjust the threaded pipe location by screwing up or down accordingly. Once correct threaded pipe location has been adjusted, remove main frame and tighten hex nut against mounting strap. Make certain not to spin threaded pipe during tightening.
3. Electrical connections: please refer to enclosed supplement installation instruction for wire connection
4. Place main frame through the installed threaded pipe so that it sits flush against ceiling. Be sure all wires are tucked inside. Secure main frame to ceiling by fastening lock washer and coupler onto top threaded pipe. Note: Coupler must turn at least 3 times, if it does not you must remove coupler and lengthen threaded pipe accordingly.
5. Install long center pipe by screwing into bottom of coupler. Note: correct position of center pipe at illustration.
6. Install the bulb (not included.)

# FEISS®

EST. 1955

GENERATION  
BRANDS™

