



Marmon Foodservice
Technologies

A Berkshire Hathaway Company

ALL-IN-ONE WATER DISPENSER SYSTEM

Experience ultimate hydration with ambient, cold, hot, and sparkling water, all from a sleek unit featuring an electronic faucet for precise control and modern design.

Enjoy effortless convenience, reduce single-use plastics, and keep your family refreshed.

Elevate your water experience today!



High Performance

Four types of water: ambient, chilled, hot and sparkling



Hot Water

Hot water from 60° up to boiling 100°



Compact Footprint

Unit dimensions that can fit under any kitchen sink



* Cooling Power

High Cooling power for chilled water with temperature set from 4° up to 10°



Low noise


Low-noise design, can be located close to offices and open kitchens




Easy to use

Easy to install and control through the 4.8" touch display

3 FAUCET MODELS TO BEST FIT YOUR KITCHEN DESIGN

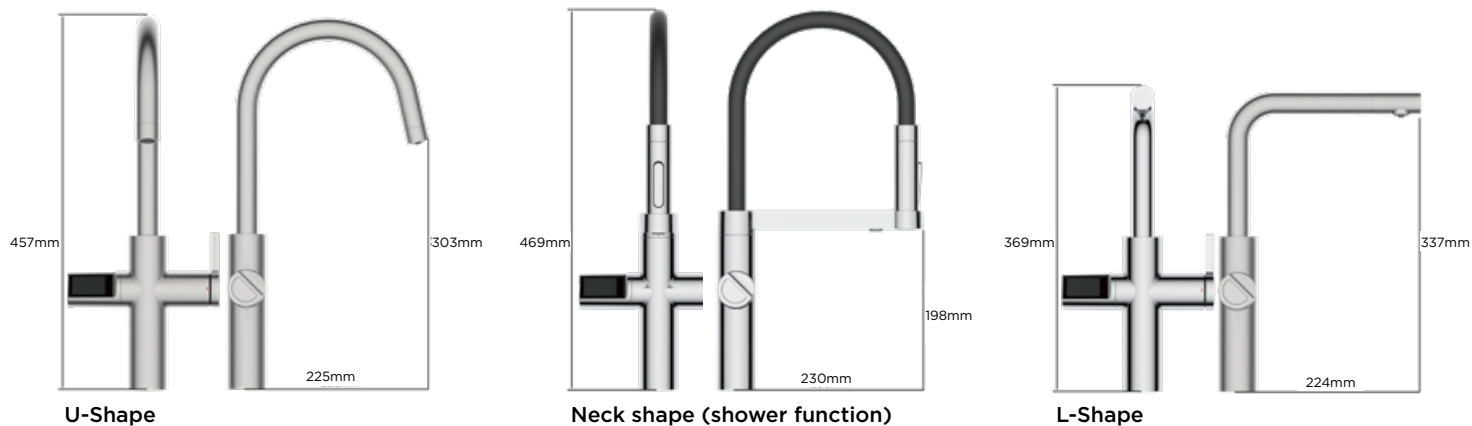

FAUCETS COLOUR RANGE

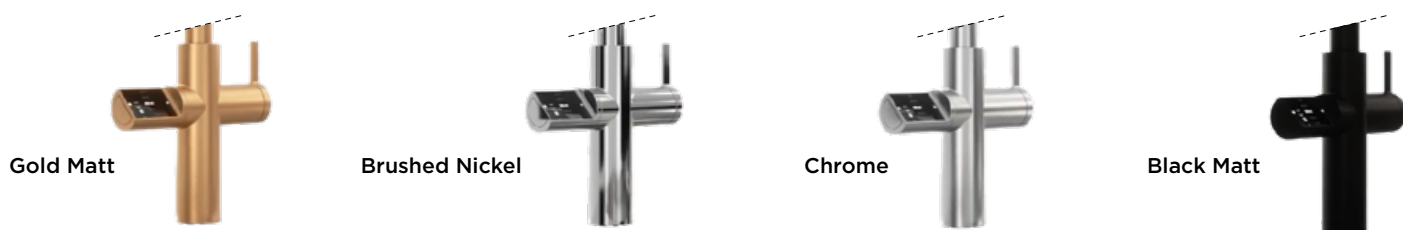

GENERAL INFORMATION

Unit Information

Weight	15,8 kg
Weight (unit-faucet-accessories)	23,5 kg
Dimension Unit (HxDxW)	439x516x200 mm
Euro pallet:	1200x800x150 mm /20-24kg
Max load 8 units / pallet:	1200x800x1680 mm

System Pressure

Water Inlet	Min. 2 bar (dynamic)
	Max. 10 bar (dynamic)
CO ²	4,8 bar

Electricity

Supply voltage:	115 - 230V / 50-60Hz
Power supply	115/230V
Max Power	2250W / -10A (EMEA-APAC-KSA)
	1250W / -10.5A (US)
Consumption kwh	360 kWh/year *

Protection class:

Protection class:	IP21 (DIN EN 60529)
Water flow (Cold)	1.9 - 2.5 l/min
Water flow (Hot)	1.1 - 1.3 l/min

*daily consumption of 4 l soda (coldest temp. setting) and 4 l hot (highest temp. setting)

PERFORMANCE

Cooling (max dispense)	1 L (10min re-cool)
Heating (max dispense) 50hz, 230V	1 L (-5min re-heat)
Heating (max dispense) 50hz, 230V	1 L (-10min re-heat)

Carbonation

6.0 - 6.5 g/L (sparkling) @ 4°C
5.0 - 6.0 g/L (medium) @ 4°C

Refrigerant:	R600a
Refrigerant amount	-25 g

Noise

Standby (no cooling, no tapping)	≤ 16 dB(A)
Cooling (stabilizing water temp.)	≤ 32 dB(A)
Cooling after tapping	≤ 35 dB(A)
During tapping	≤ 54 dB(A)

ACCESSORIES

CO² Bottle

Connection:	ACME thread (Ø21-ACME 6/G)
Dimensions:	Ø60 mm, height of 360 mm (with thread) 425 gr bottle

Filter

Standard	
Weight (dry)	-1 kg
Dimension (Height-Width)	260x95 mm
Capacity	-1.280 Liter @ 12° dH

Faucets

Weight	-2 kg
Dimension (Height-Depth-Width)	460*240*160 mm
Body	Stainless steel / Zinc-Alloy

Certifications

CE, RoHS 2011/65/EU, REACH, CCC, ACS, 1935:2004, PZH, DM174

To learn more in action, visit www.cornelius-emea.com

To contact us directly, send an email to customerservicecz@marmonfoodservice.com



Marmon Foodservice
Technologies

A Berkshire Hathaway Company