

# CARABEL

FR44622BCH



Bulbs: 100W MED.

## ASSEMBLY INSTRUCTIONS


Assembly of this fixture will be accomplished by first assembling the main body, installing the mounting hardware to the junction box, making all necessary electrical connections and then hanging the fixture.

**SAFETY WARNING:** Read wiring and grounding instructions [FRIS18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

### STEP 1

- 1 Slip center column (1) along wire and thread onto coupler (a). - See Drawing 1.
- 2 Remove ball knob (2) from stud (c) located on arm of cage (4).
- 3 Slip shade (3) into the cage assembly (4). Making sure to line up holes (b) in shade tab with stud (c) on cage arms.
- 4 Thread ball knob (2) onto end of stud (c) to secure shade.
- 5 Thread stem (5) into coupler (d) located in the center of the socket assembly, approximately 3/8".
- 6 Slip cap (6) flat part up, onto stem (5) followed by tube (7) and hold in position.
- 7 Slip bottom cap (8) flat side down, onto stem (5) and over end of tube (7), followed by rubber washer (9). Rubber washer will hold parts in position.
- 8 Fixture can now be lamped accordingly. Slip glass lens (10) onto stem (5) and hold in position.
- 9 Slip steel washer (11) onto stem (5), then thread hex nut (12) onto stem (5) and tighten to secure glass lens.
- 10 Thread finial (13) onto end of exposed stem (5) to complete assembly.


[DRAWING 1]

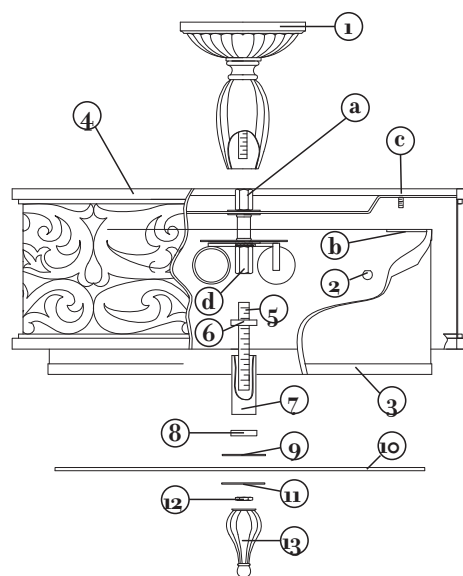

### STEP 2

- 1 Prepare mounting strap (a) by threading the two long mounting screws (b) into the back of the mounting strap (a), making sure the holes into which the screws are threaded match the spacing of holes (d) in the backplate (e) - See Drawing 1.
- 2 Attach mounting strap (a) to junction box (j) using two screws (c).
- 3 Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet [FRIS18] and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.
- 4 To mount fixture, slip the two mounting screws (b) through the two mounting holes (d) in the canopy (e).
- 5 While holding fixture in place, thread the two ball knobs (f) on to the end of the mounting screws (b), and tighten.

[DRAWING 2]

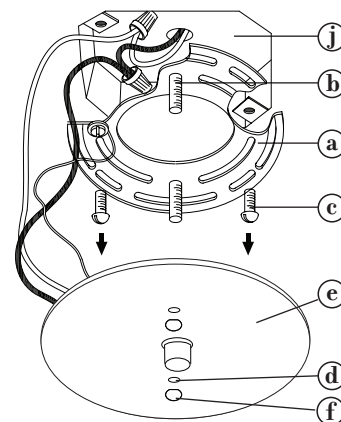

FREDRICK RAMOND

ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

12.1.09