

Assembly Instructions For

0L3003LP


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly.

Bulbs not included.

1. Screw short threaded end of center pipe into socket assembly.
2. Slip candle cover tube onto sockets.
3. Install light bulb (not included). See relamping label at socket area for type and Maximum allowed Wattage.
4. Slide top cover and font through center pipe till checks onto main frame. Lock them into position with rubber washer and finial.
5. Electrical installation onto Pier-mount: if you are replacing an existing fixture, discontinued and remove the old fixture.
 - A) Slip post cup over post. Mark position of holes in post cup on Post.
 - B) Drill 1/8" (3mm) diameter pilot holes in Post at places where marked.
 - C) Make wire connection; please follow enclosed supplement installation instructions for electrical installation and fixture installation.
 - D) Slip post cup onto post. Align holes in post cup with holes in post. Attach post cup to post with sheet metal screws.
6. Once the cement is fully dried, place the Post Base over the Anchor Bolts and pull Electric Supply Wire through hole. Secure Post Base to concrete with three (3) Cap nuts threaded over Anchor Bolts as shown on the Fig. 1/ Fig. 2A.
7. Place Bottom Column over to Post Base aligning three (3) screws supplied and screws them. Fig 2B.
8. Thread Top Column into top of Bottom Column until secure as shown Fig. 2C of 2D.
9. Screw the post cup with bottom column 2D. Make electrical wiring connections are made AFTER the Center body assembly is threaded and secure.

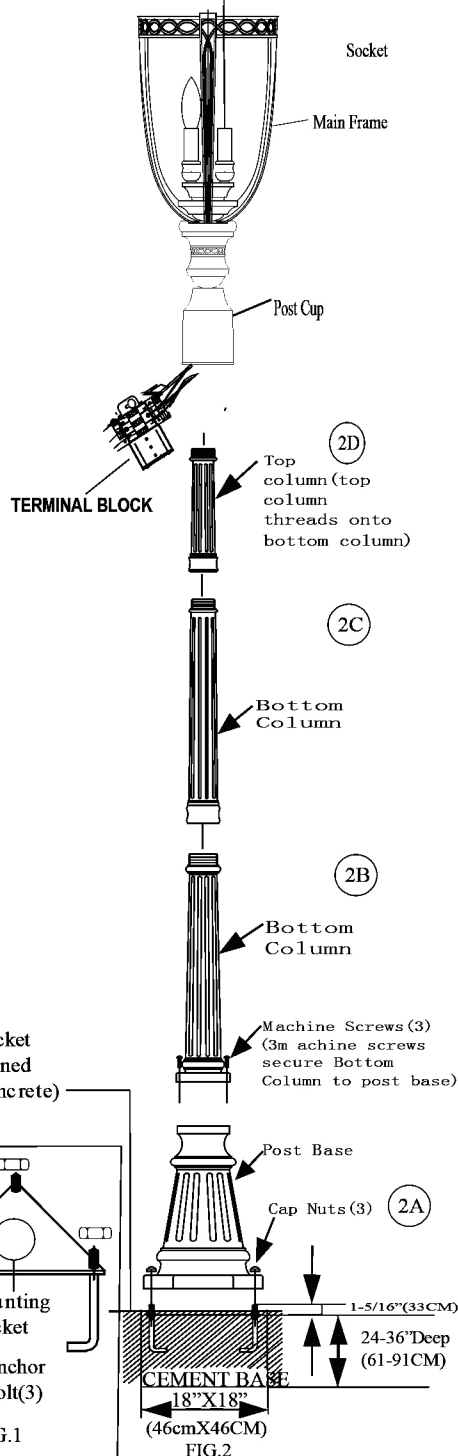

GENERATION LIGHTING