

# Shepherd 2 Light Flush Mount

OL10613 | 1.1

# FEISS®

EST. 1955

Outdoor

## GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This product may be dimmed with a standard incandescent dimmer.

This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

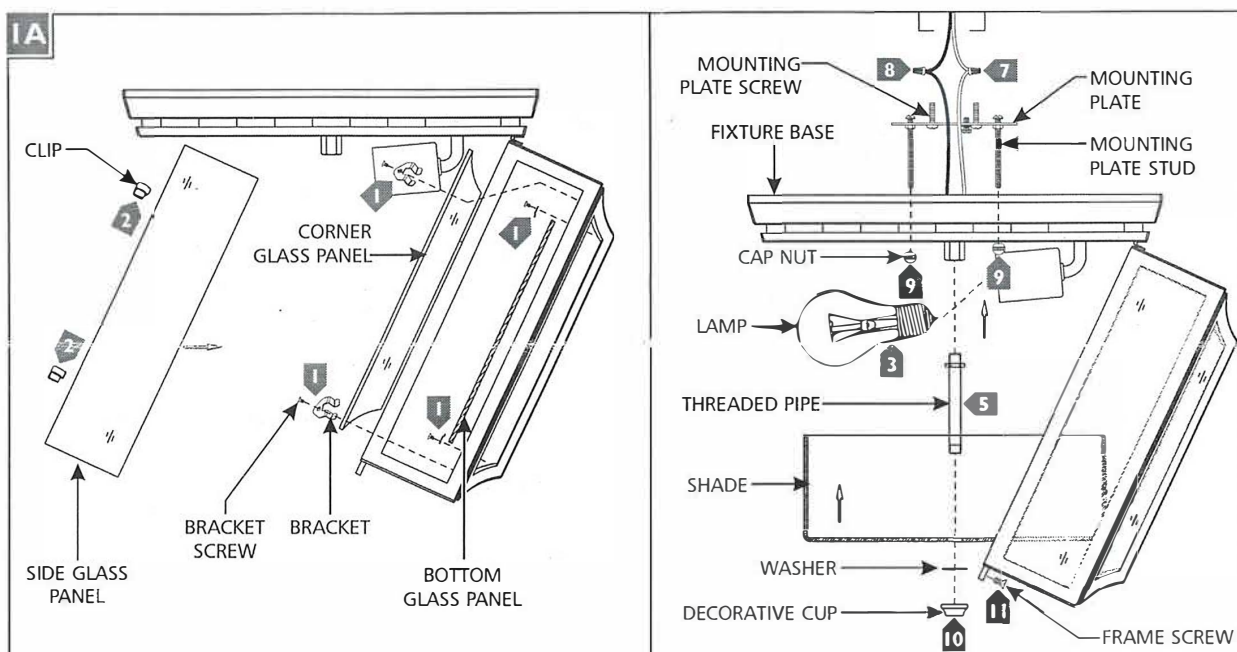

- 1 Install the bottom and corner glass panels to the frame by carefully sliding them into the frame and securing them using the brackets and bracket screws as shown.
- 2 Install the side glass panels by carefully sliding them into the frame and securing them using the clips as shown.
- 3 Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 4 Secure the mounting plate to the junction box with two mounting plate screws.
- 5 Screw the threaded pipe to the bottom of the fixture base.
- 6 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire to the hot power line wire with a wire nut.
- 9 Place the fixture base onto the mounting plate studs and secure it in place by screwing the cap nuts on the mounting plate studs.
- 10 Place the shade and washer onto the threaded pipe and secure them in place by screwing on the decorative cup.
- 11 Swing the frame closed and secure it in place by screwing the frame screw into the fixture base.