




Bulb
(not included)



Counter
Ring



Glass
Shade

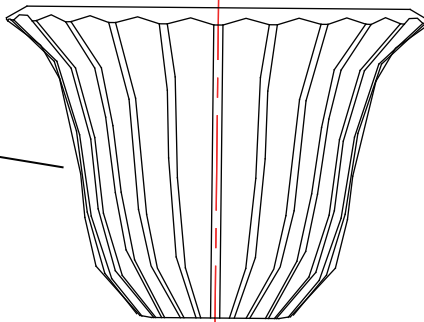

INSTALLATION PLATE

PLASTIC
BOLT

WOODEN
SCREW

TERMINAL
BLOCK

Cap Nuts

**IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE
OR CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION**

Carefully unpack and identify all parts before assembly. Bulb not included.

1. Before proceeding below instructions follow enclosed "Multiple Standard Installation Instructions" for electrical and fixture installation onto outlet box.
2. Remove counter ring and spacer tube from socket. Set them aside.
3. Install glass shade onto fitter and lock into position by installing the spacer tube and counter ring back onto the socket.
4. Install light bulb (not installed). See relamping label at socket area for type and maximum allowed wattage.
5. VS11202 & VS11204 ONLY:
Install finials onto top and bottom of fixture. See fig. 2.

VS11203 ONLY:
Install finial onto top of fixture. See fig. 3.

A Quality Home Brands Company®

FEISS®

EST. 1955

GENERATION
BRANDS™

