

Installation Instructions for
Harrow 2 Light Flush Mount

FM393


CE

FM393 1/1

FEISS

EST. 1955

05/15

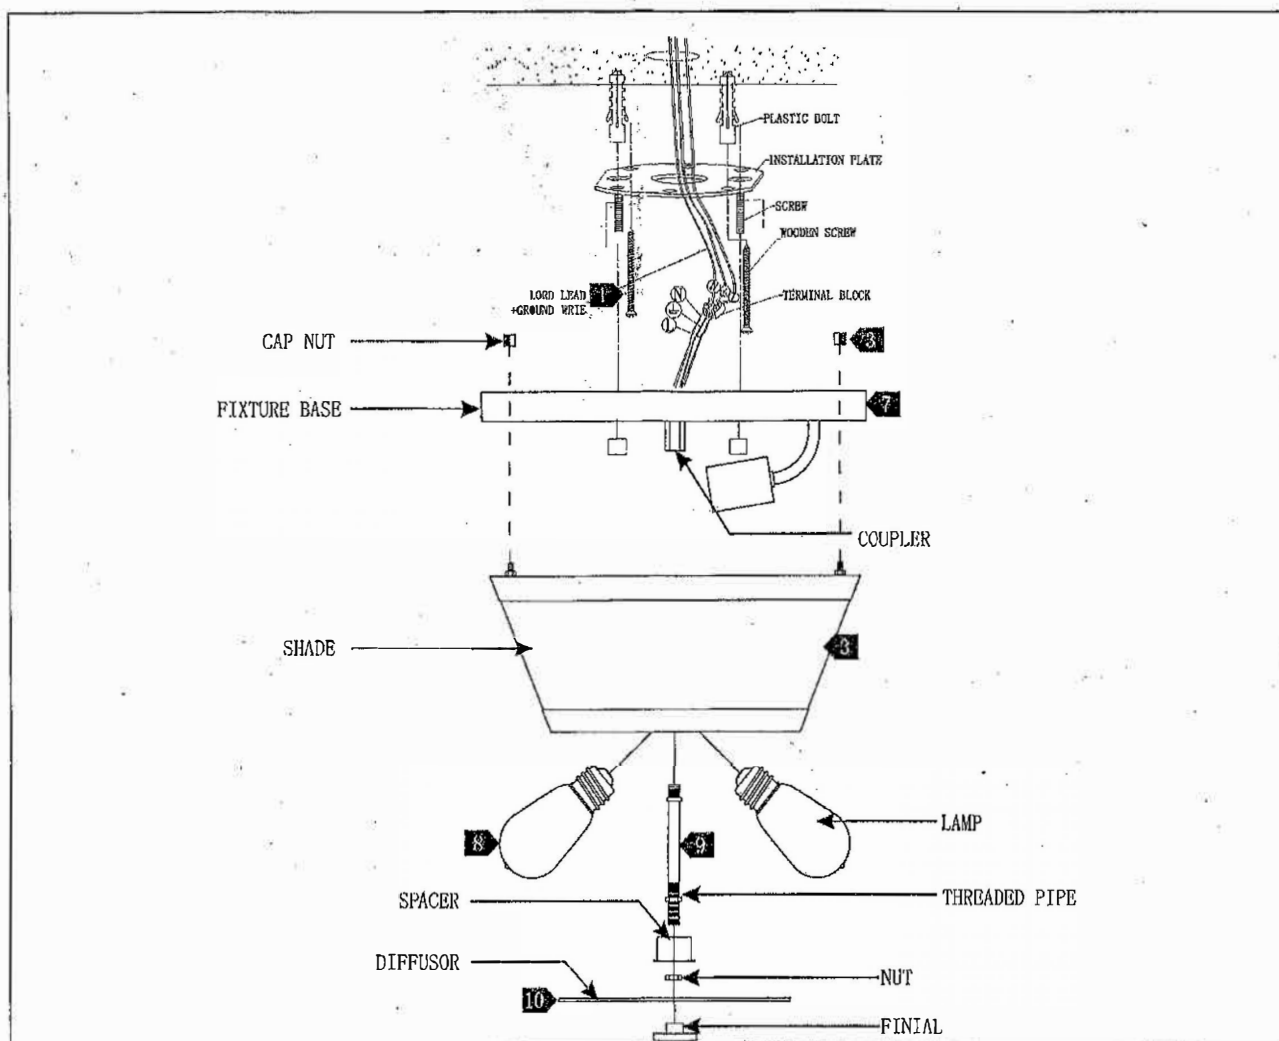

- 1 If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 2 Secure the mounting plate to the electrical box with two mounting plate screws.
- 3 Install the shade to the fixture base and secure them together using the cap nuts.
- 4 Follow enclosed supplement installation instructions for electrical and fixture installation onto house ceiling.
- 5 Place the fixture base and washer over the threaded nipple, then secure them in place by fastening the coupler.
- 6 Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 7 Screw the threaded pipe onto the coupler, then place the spacer over the threaded pipe and secure it in place by tightening the nut.
- 8 Place the diffuser over the threaded pipe and secure it in place by tightening the finial.