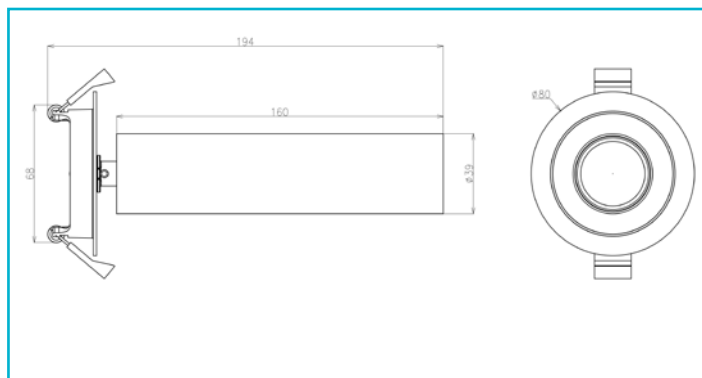


**Special features**

- Glare-free, due to low UGR value (<19)
- Slim design with only 39 mm diameter
- Incl. silver-coloured reflector ring
- Installation diameter 68 mm

Housing Material	Aluminium	Working Temperature	-20 to 45 °C
Housing Color	Black	Storage Temperature	-20 to 65 °C
Protection Class	Protection class II/protective insulation	IP Protection Class	IP 20
Rated Input	5 W	Life Time L70 / B50	50000 h
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Switching Cycles	100000
Power Supply Unit incl.	Yes	Power Consumption	5 kWh/1000h
Connection Type	Clamp	Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class E.
Dimmable	Yes		
Control	Leading-edge dimmer, Trailing-edge dimmer		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Color Temperature	2700 K		
Colour Consistency	3 SDCM		
Colour Rendering Index (Ra)	90		
Rated Luminous Flux	500 lm		
Luminous Efficiency	100 lm/W		
Rated Angle of Reflection	36 Degree		
UGR	19		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Swivel Angle	60 Degree		
Rotation Angle	300 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Length	194 mm		
Diameter	80 mm		
Cut Out Diameter	68 mm		
Product weight	273 g		