


GENERATION BRANDS

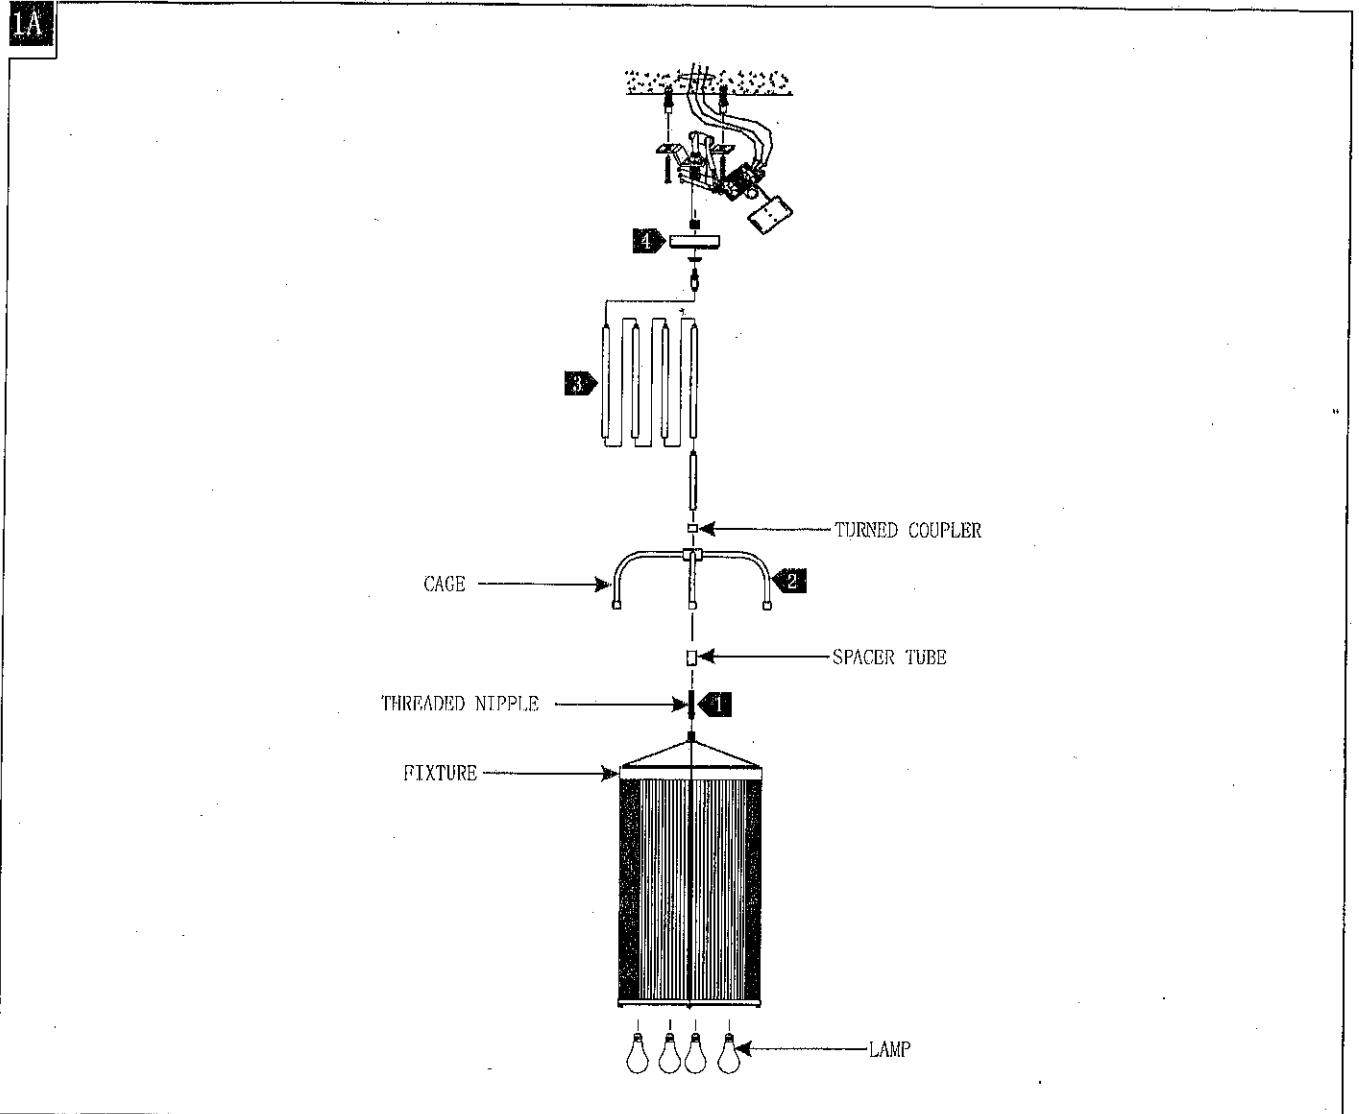

- 1 Assembly the cage with space tube and threaded nipple on-top of the fixture frame.
- 2 Threaded the stems with your desired length by nipples and then wiring thru the stems and swivel into the canopy.
- 3 Fixed the U-bracket onto the ceiling surface with 2 wooden screws.
- 4 Follow enclosed supplement installation instructions for electrical and fixture installation onto the ceiling.
- 5 Screw the lamp(s) into the socket(s). Refer to the label on/near the socket for Max Wattage Information.

Fixture Installation Instructions

2038

CE

11/12

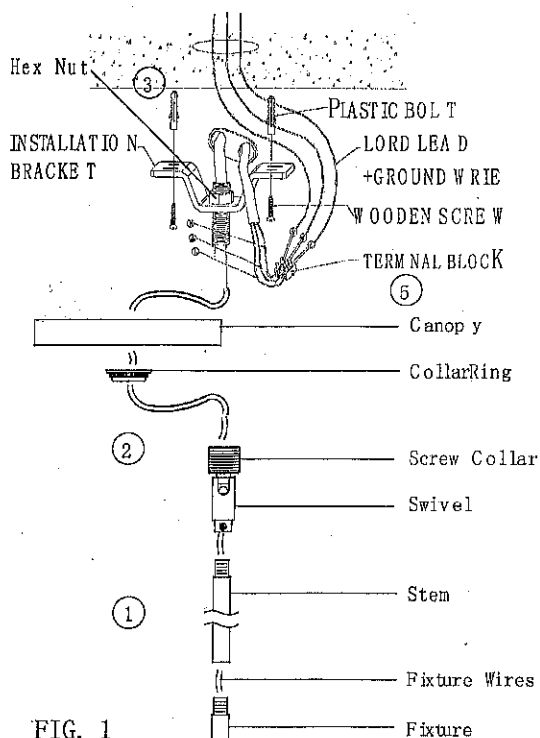


FIG. 1

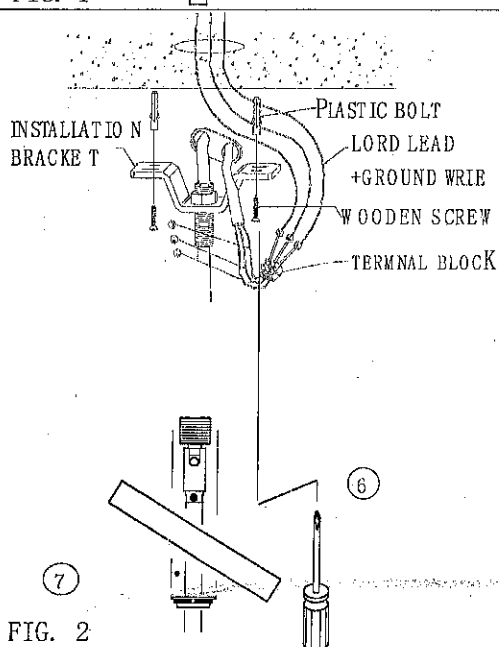


FIG. 2

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

1. This fixture can be installed with or without stems:

WITH STEMS:

- A. Choose desired installation height from dimensions shown in accompanying assembly instructions sheet diagram.
- B. Thread fixture wires through each stem to be used. Note correct position of stems from left diagram. Screw all stem together until secure.
- C. Install bottom end of stem assembly by screwing into top of fixture.
- D. Install screw collar by screwing onto swivel.
- E. Thread fixture wires through swivel. Then install swivel by screwing onto top end of stem assembly.

WITHOUT STEM:

- A. Install screw collar by screwing onto swivel.
- B. Thread fixture wires through swivel. Then install swivel by screwing directly onto top of fixture.

2. Install a hex nut onto one end of threaded pipe leaving about $\frac{3}{8}$ " (10mm) of thread exposed. Install same end of pipe by screwing into screw collar. Secure threaded pipe by tightening hex nut.

3. Slip collar ring and canopy (the side with labels facing up) until they rest on top of fixture.

NOTE: During sliding be careful not to scrape stems or fixture surface.

4. A. Test install mounting bar onto ceiling. Determine whether installation bracket sits flush against ceiling surface or recessed. If recessed, measure how deep our included hardware can accommodate up to $\frac{1}{2}$ " (13 mm) deep recess.
B. Remove installation bracket.
C. Screw installation bracket onto threaded pipe until it rests on top of hex nut.
D. Install another hex nut and firmly secure installation bracket into position.

5. Cut any excess fixture wires and ground wire leaving only about 8" (20 cm) length from top end of threaded pipe. Then split fixture wires and strip off $\frac{3}{4}$ " of plastic insulation from each end.

6. While one person lift the whole assembled fixture have another person install installation bracket by screwing securely onto ceiling. Use two wooden screws supplied by accessory bag.
NOTE: For without stem assembly, tilt canopy in order to reach mounting hole location. See fig. 2.

7. Fixture wires connection: please refer installation instruction for wire connection.

