

Bennie Outdoor Wall**OL14100,OL14101,OL14102****I.0**

GENERATION LIGHTING

Outdoor**GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for wet locations.

For a complete list of dimmers, visit our website at www.Feiss.com

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

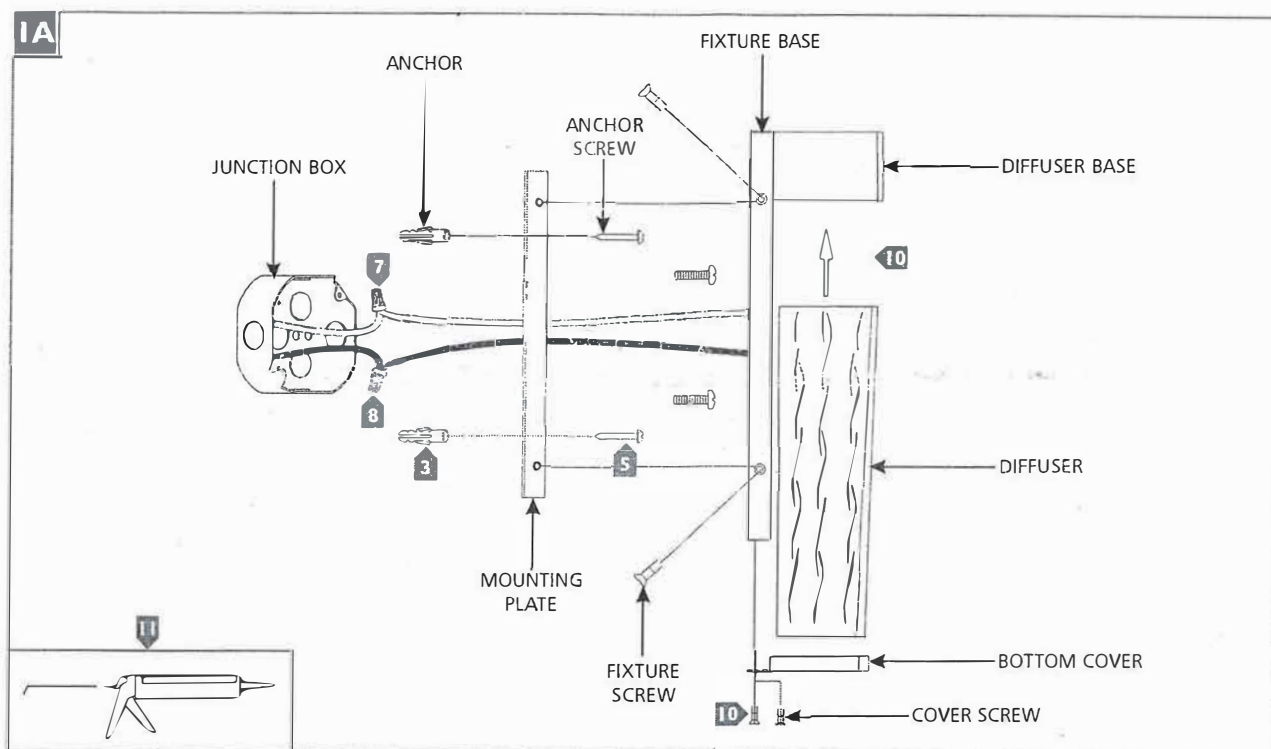

- 1** For Models OL14101 and OL14102 Only: Temporarily install the mounting plate to the junction box.
- 2** For Models OL14101 and OL14102 Only: Mark the anchor hole locations on the mounting plate and remove the mounting plate.
- 3** For Models OL14101 and OL14102 Only: Drill appropriate size holes at the marked locations and install the anchors.
- 4** Secure the mounting plate to the junction box.
- 5** For Models OL14101 and OL14102 Only: Screw the anchor screws into the anchors.
- 6** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire to the hot power line wire with a wire nut.
- 9** Mount the fixture base onto the mounting plate and secure it with the fixture screws.
- 10** Insert the diffuser into the diffuser base and secure it in place by installing the bottom cover to the bottom of the fixture base using the cover screws.
- 11** For wet locations, caulk around the base of the fixture with waterproof construction sealant.