Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Milino

Supplier's address: Importabteilung, Römerstraße 39, 4600 Wels, AT

Model identifier: 79680391-01

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	N.A		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	F
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	800 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control — Height	1 500	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
Outer dimensions without separate control gear, lighting control — Width	12		
Outer dimensions without separate control gear, lighting control — Depth	3		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[a]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,440 0,313
Parameters for LED and OLED light sources:				
R9 colour rendering index value		7	Survival factor	0,10
the lumen maintenance factor		0,96		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[b]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		1,0	Stroboscopic effect metric (SVM)	0,4

[a] '-' : not applicable;

[b] '-' : not applicable;

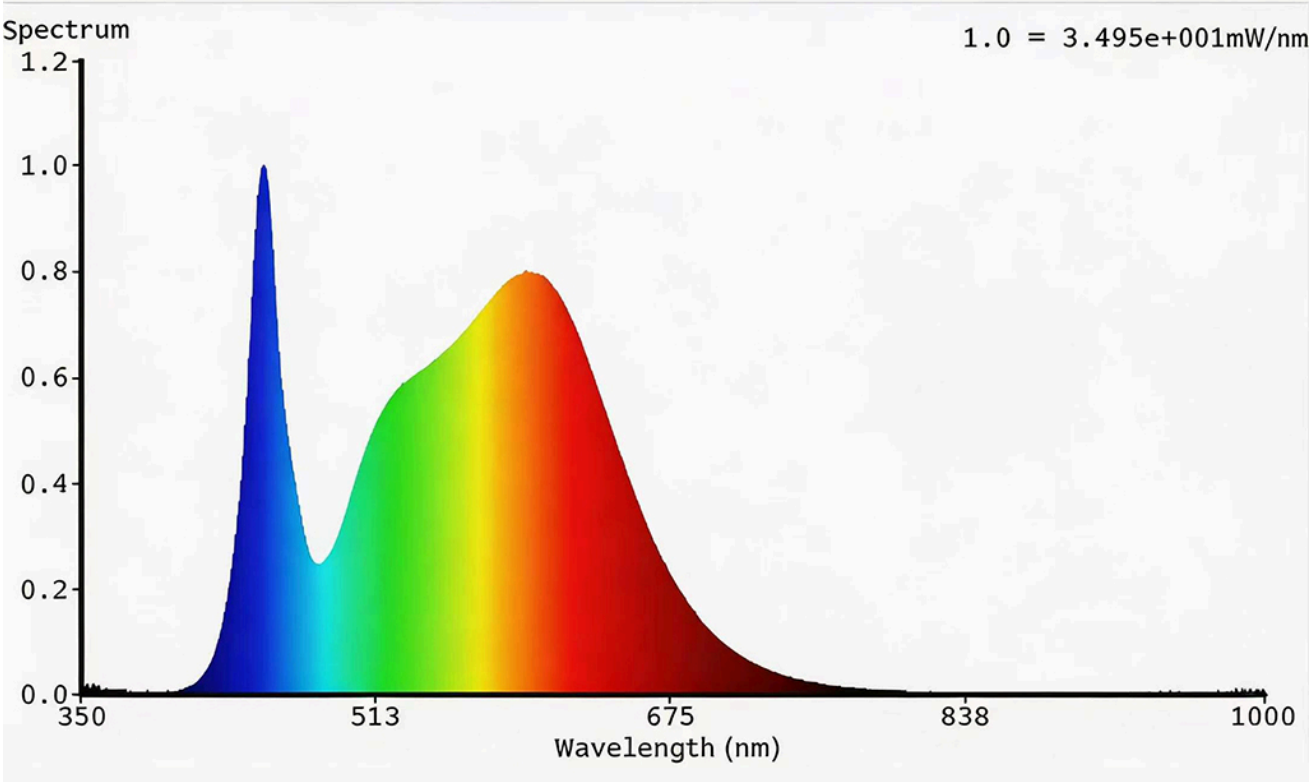
Spectrum
1.0 = 3.495e+001mW/nm
1.2
1.0
0.8
0.6
0.4
0.2
0.0
350
513
675
838
1000
Wavelength (nm)

EPREL registration number: 2858295 Model placed on the Union market from 01/11/2026.	https://eprel.ec.europa.eu/qr/2858295

Supplier: XXXLutz KG (Importer)	**Website:**
Customer care service:	
Name: Importabteilung	**Website:**
Email: EPREL-info@xxxlgroup.com	**Phone:** +43 50 111 500 949
Address: Römerstraße 39 4600 Wels Austria	